
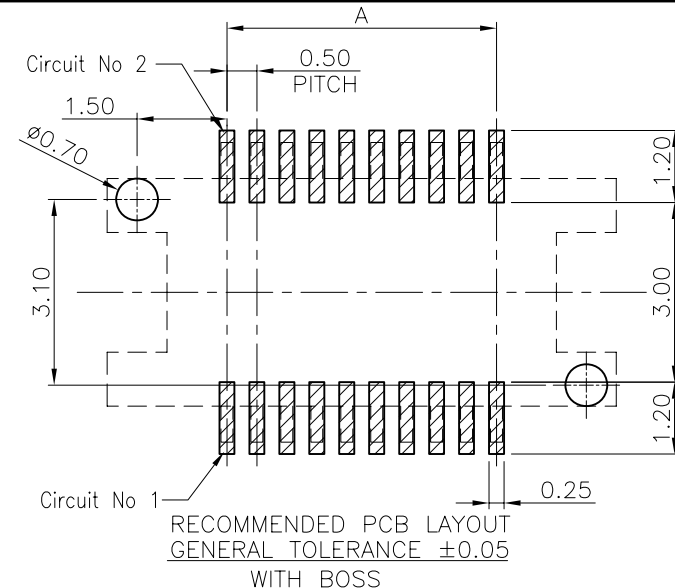
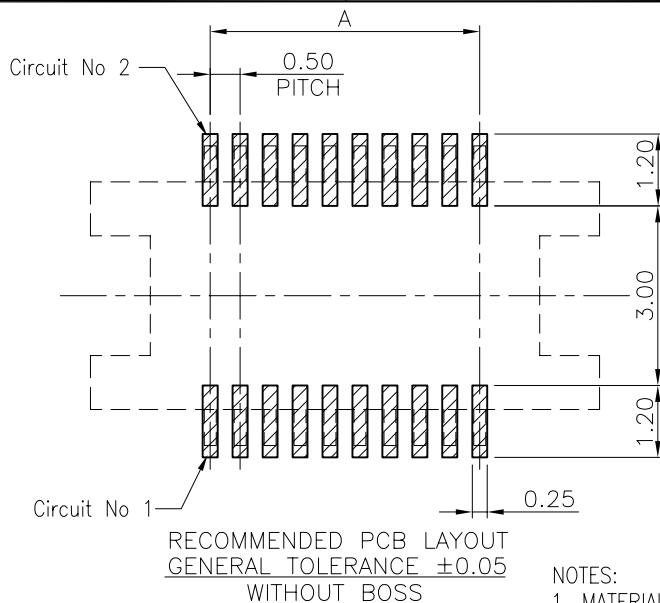
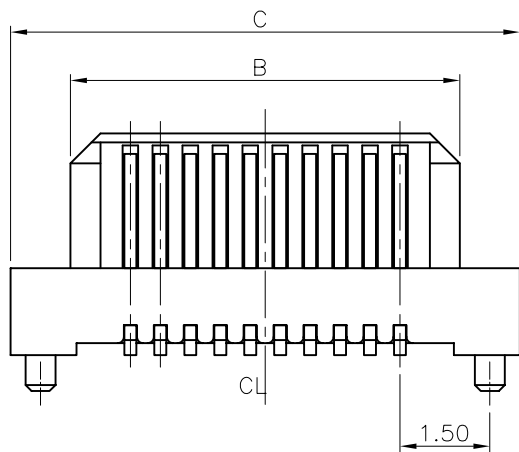


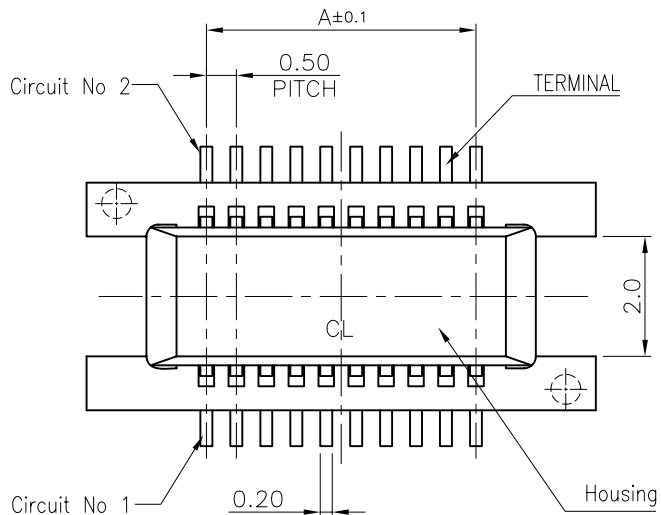

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0;

1.2 CONTACT: COPPER ALLOY

2. FINISH: 50u" MIN NICKEL UNDERPLATING OVERALL

1:GOLD FLASH

C:15u" GOLD ON CONTACT

3. REFLOW SOLDER CAPABLE TO 260°C

PER ACES SPEC.

4. SPEC. PLS. REFER TO PS-50150-xxxxx-xxx

5. PART NUMBER

50044-XXX X X-XXX

XXX	Color	Halogen Free	Polarization	Packing
001	Black	HF	without boss	88062-XXXXCR
002	Black	HF	with boss	88062-XXXXHR
003	Black	HF	with boss	88062-XXXXB-45
004	Natural	HF	without boss	88062-XXXXCR

PLATING

1:GOLD FLASH

C:15u" GOLD ON CONTACT

NO OF CKT

PACKING

0:TAPE REEL

1:TUBE PACKAGE

CKT	Dim A	Dim B	Dim C
16	3.5	5.5	7.5
20	4.5	6.5	8.5
30	7.0	9.0	11.0
40	9.5	11.5	13.5
50	12.0	14.0	16.0
60	14.5	16.5	18.5
70	17.0	19.0	21.0
80	19.5	21.5	23.5
100	24.5	26.5	28.5
120	29.5	31.5	33.5
160	39.5	41.5	43.5

一般公差 TOLERANCES X ±0.5 XX ±0.15 .X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronics Co.,Ltd.				
檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION ① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	品名 (TITLE) 0.5mm BTB D/R RCPT SMT S/T TYPE 圖號 (DWG NO.) 50044-XXXXX-XXX		製圖 (DR) '16/04/28 LIYAQIN 審核 (CHKD) BRAVE			
			核准 (APPD) FRANK			
	表面處理 (FINISH) _____		張數 (SHEET) 1 OF 1			
		比例 (SCALE) 5:1	單位 (UNITS) mm		尺寸 (SIZE) A4	版本 (REV) F