




Connectors > PCB Connectors > PCB Headers & Receptacles

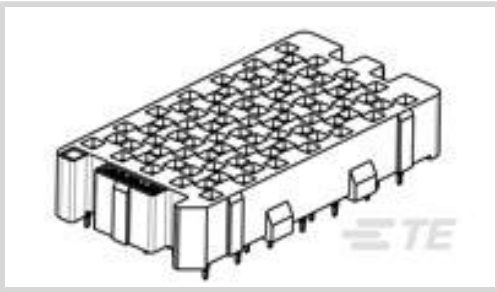

PCB Connector Assembly Type: **PCB Mount Receptacle**  
PCB Mount Orientation: **Vertical**  
Connector System: **Board-to-Board**  
Number of Positions: **24, 83**  
Centerline (Pitch): **3.04 mm, 6.09 mm [ .12 in, .24 in ]**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Pairs per Column	4
Number of Power Positions	0
Number of Pairs	24
Number of Loaded Positions	83
Stackable	No
Number of Signal Positions	4
PCB Mount Orientation	Vertical
Number of Positions	24, 83
Board-to-Board Configuration	Parallel

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	750 VAC
Insulation Resistance	1000 MΩ
Impedance	100 Ω



Operating Voltage

250 VAC

Signal Characteristics

Data Rate

16 Gb/s

Body Features

Primary Product Color

Black

Contact Features

PCB Contact Termination Area Plating Material Thickness

.5 – 2.54 µm[19.685 – 100 µin]

Contact Layout

Staggered

Mating Tab Width

.69 mm, 4.5 mm[.027 in][.177 in]

Mating Tab Thickness

.41 mm[.015 in]

PCB Contact Termination Area Plating Material Finish

Matte

PCB Contact Termination Area Plating Material

Tin

Contact Base Material

Copper Alloy

Contact Mating Area Plating Material

Gold

Contact Mating Area Plating Material Thickness

.076 µm[3 µin]

Contact Type

Socket

Contact Current Rating (Max)

1.5 A

Termination Features

Rectangular Termination Post & Tail Thickness

.15 mm[.005 in]

Rectangular Termination Post & Tail Width

.43 mm[.016 in]

Termination Post & Tail Length

1.47 mm[.057 in]

Termination Method to Printed Circuit Board

Through Hole - Press-Fit

Mechanical Attachment

PCB Mount Alignment Type

Post Polarization

Mating Retention

With

Mating Alignment

With

PCB Mount Retention

With

PCB Mount Alignment

With

Connector Mounting Type

Board Mount

Housing Features

Mating Entry Location

Top

Centerline (Pitch)

3.04 mm, 6.09 mm[.12 in][.24 in]



Housing Material	LCP (High Temp Thermoplastic)
------------------	-------------------------------

Dimensions

Connector Height	4.49 mm[.176 in]
PCB Thickness (Recommended)	.06 mm[.8 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Box, Tray
------------------	-----------

Product Compliance

For compliance documentation, visit the product page on TE.com>




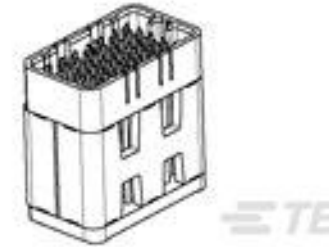


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



### Compatible Parts

 <p>TE Part # 7-2143410-5 STRADA MESA,HD,HF,024,000,00,SN,N,25</p>	 <p>TE Part # 6-2143410-6 STRADA MESA,HD,HF,024,000,00,SN,N,16</p>	 <p>TE Part # 9-2143410-0 STRADA MESA,HD,HF,024,000,00,SN,N,40</p>	 <p>TE Part # 1-2143410-6 STRADA MESA,HD,HF,024,000,00,PB,N,16</p>
 <p>TE Part # 2-2143410-5 STRADA MESA,HD,HF,024,000,00,PB,N,25</p>	 <p>TE Part # 4-2143410-0 STRADA MESA,HD,HF,024,000,00,PB,N,40</p>		

### Customers Also Bought

 <p>TE Part #2322030-8 MBXLE R/A PLUG 2ACP+16S+3ACP,HF</p>	 <p>TE Part #2057989-1 IMP100S,R,RA6P14C,LG,39</p>	 <p>TE Part #2057990-1 IMP100S,R,RA6P14C,RG,39</p>	 <p>TE Part #2081857-1 MMCX STR PCB MOUNT RECEPTACLE 50 OHM</p>
 <p>TE Part #2373026-1 CA, CCJ TO 3*Dynamic</p>	 <p>TE Part #2386592-2 Mezzanine Power Pin 13 Stack</p>	 <p>TE Part #2408288-1 CA. DUAL RAPID LOCK 5.7MM, 5X10AWG, 896MM</p>	 <p>TE Part #2408288-2 CA. DUAL RAPID LOCK 5.7MM, 5X10AWG, 536MM</p>

### Documents

Product Drawings

STRADA MESA,RC,HF,024,000,00,SN,N,NA

English

CAD Files

Customer View Model



[ENG\\_CVM\\_CVM\\_5-2143411-1\\_A.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_5-2143411-1\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-2143411-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

**Product Specifications**

[Application Specification](#)

English