5179029-4 - ACTIVE

Free Height

TE Internal #: 5179029-4 PCB Mount Header, Vertical, Board-to-Board, 100 Position, .8 mm [. 031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > Free Height Plug Connector: Board-Board, Vertical, 100, 0.8mm



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 100

Centerline (Pitch): .8 mm [.031 in]

All Free Height Plug Connector: Board-Board, Vertical, 100, 0.8mm (22)



Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	100
Board-to-Board Configuration	Parallel
Electrical Characteristics	
Dielectric Withstanding Voltage (Max)	500 VAC

PCB Mount Header, Vertical, Board-to-Board, 100 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height



Insulation Resistance	2 MΩ
Operating Voltage	100 VAC
Body Features	
Primary Product Color	Natural
Contact Features	
PCB Contact Termination Area Plating Material Thickness	2 μm[78.74 μin]
Contact Layout	Inline
Mating Tab Width	.4 mm[.016 in]
Mating Tab Thickness	.2 mm[.008 in]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.2 μm[8 μin]
Contact Type	Tab
Contact Current Rating (Max)	.5 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.25 mm[.01 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
Mounting Alignment Feature Length	.5 mm[.02 in]
PCB Mount Alignment Type	Positioning Bosses
Mating Alignment	With
Mating Alignment Type	Polarization
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Housing Features	
Mating Entry Location	Тор
Centerline (Pitch)	.8 mm[.031 in]

C For support call+1 800 522 6752

04/18/2024 11:52PM | Page 2

PCB Mount Header, Vertical, Board-to-Board, 100 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height



Connector Height6 mm.236 in]Stack Height6 mm, 10 mm, 14 mm, 18 mm.236 in].394 in].551 in].709 in]Usage Conditions		
Connector Height 6 mm.236 in] Stack Height 6 mm, 10 mm, 14 mm, 18 mm.236 in].394 in].551 in].709 in] Usage Conditions in].551 in].709 in] Usage Conditions 40 – 125 °C[40 – 257 °F] Operating Temperature Range 40 – 125 °C[40 – 257 °F] Operating Temperature Range None Operation/Application Signal Icruit Application Signal Ive Lammability Rating UL 94V-0 Packaging Features Si na Ive Lammability Rating Si na	Housing Material	Matte
Stack Height6 mm, 10 mm, 14 mm, 18 mm[.236 in][.394 in][.551 in][.709 in]Usage ConditionsHighHousing Temperature RatingHighOperating Temperature Range-40 - 125 °C[-40 - 257 °F]Operation/ApplicationSignalCreation/ApplicationSignalIndustry StandardsU Padaging FeaturesIndustry StandardsSignalIndustry StandardsSignal <td>Dimensions</td> <td></td>	Dimensions	
inj[.551 in][.709 in] Usage Conditions Housing Temperature Rating High Operating Temperature Range Operation/Application Assembly Process Feature Assembly Process Feature Assembly Process Feature Circuit Application Circuit Application Signal Circuit Application UL Flammability Rating UL Flammability Rating Circuit Application Signal Circuit Application Signal Signal Circuit Application Signal Signal Circuit Application Signal Circuit Application Signa	Connector Height	6 mm[.236 in]
Housing Temperature Rating High Operating Temperature Range -40 – 125 °C[-40 – 257 °F] Operation/Application None Assembly Process Feature None Circuit Application Signal Industry Standards UL Flammability Rating VL Flammability Rating UL 94V-0 Packaging Quantity 10	Stack Height	
Operating Temperature Range -40 – 125 °C[-40 – 257 °F] Operation/Application None Assembly Process Feature None Circuit Application Signal Industry Standards UL Flammability Rating UL Flammability Rating UL 94V-0 Packaging Peatures .5 in Packaging Quantity 10	Usage Conditions	
Operation/Application None Assembly Process Feature None Circuit Application Signal Industry Standards UL Planmability Rating UL Flammability Rating UL 94V-0 Packaging Features .5 in Packaging Quantity 10	Housing Temperature Rating	High
Assembly Process Feature None Circuit Application Signal Industry Standards UL Flammability Rating UL Flammability Rating UL 94V-0 Packaging Features 5 in Packaging Quantity 10	Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Circuit ApplicationSignalIndustry StandardsUL Flammability RatingVL Flammability RatingUL 94V-0Packaging Features.5 inPackaging Quantity10	Operation/Application	
Industry Standards UL Flammability Rating UL 94V-0 Packaging Features .5 in Packaging Quantity 10	Assembly Process Feature	None
UL Flammability Rating UL 94V-0 Packaging Features .5 in Packaging Quantity 10	Circuit Application	Signal
Packaging Features .5 in Packaging Quantity 10	Industry Standards	
.5 in Packaging Quantity 10	UL Flammability Rating	UL 94V-0
Packaging Quantity 10	Packaging Features	
		.5 in
Packaging Method Box, Tube	Packaging Quantity	10
	Packaging Method	Box, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

PCB Mount Header, Vertical, Board-to-Board, 100 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | Free Height




Customers Also Bought

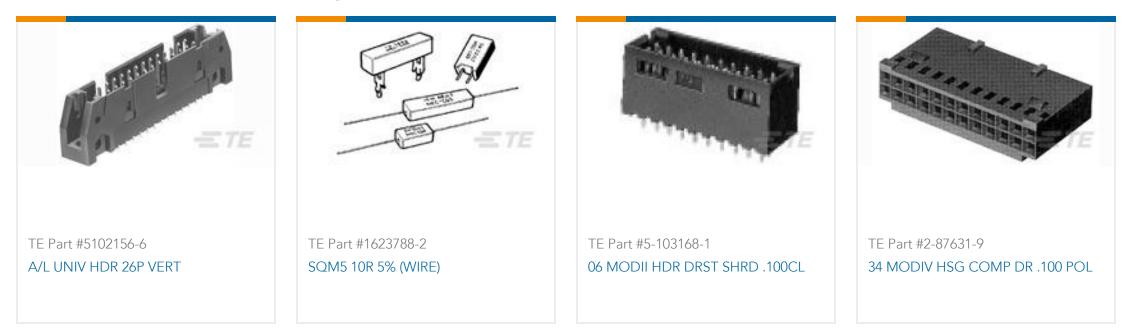

PCB Mount Header, Vertical, Board-to-Board, 100 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height



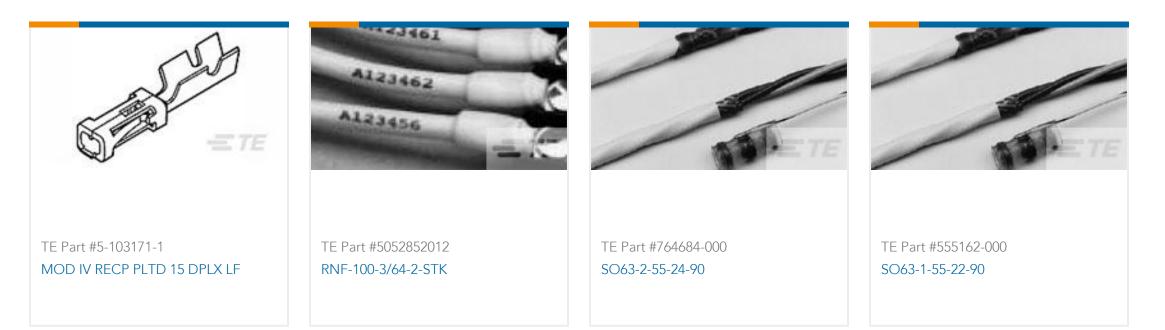



TE Part #5787334-1 HDR ASY, VERT, STR TAIL, 7.2V

Documents

Product Drawings 0.8FH,P06H.5,100,08/Sn,TU

English

CAD Files **Customer View Model** ENG_CVM_CVM_5179029-4_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5179029-4_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5179029-4_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

Fine Pitch Stacking Connectors - 0.8mm Free Height (FH) Connectors

English

Product Specifications Product Specification

English

Product Specification

English

PCB Mount Header, Vertical, Board-to-Board, 100 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height

