




Connectors > PCB Connectors > PCB Headers & Receptacles

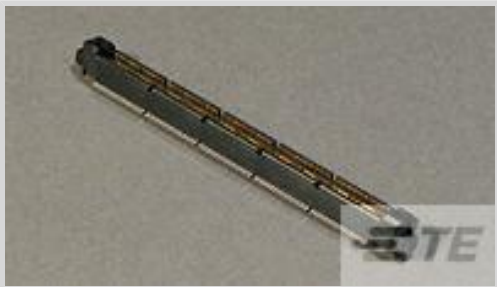

PCB Connector Assembly Type: **PCB Mount Header**
PCB Mount Orientation: **Vertical**
Connector System: **Board-to-Board**
Number of Positions: **190**
Centerline (Pitch): **.64 mm [.025 in]**

Features

Product Type Features

Ground Feature Type	Ground Bus
PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Power Positions	5
Number of Columns	95
Stackable	Yes
Number of Signal Positions	190
PCB Mount Orientation	Vertical
Number of Positions	190
Board-to-Board Configuration	Parallel

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	2 MΩ
Impedance	50 Ω
Operating Voltage	30 VAC

Signal Characteristics



Differential Signaling	Yes
Data Rate	10 Gb/s

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Length	.94 mm[.037 in]
PCB Contact Termination Area Plating Material Thickness	3.81 – 6.35 µm[149.9997 – 249.9995 µin]
Contact Layout	Inline
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 µm[29.9212 µin]
Contact Type	Pin
Contact Current Rating (Max)	11.5 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.53 mm[.021 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

PCB Mount Alignment Type	Locating Posts
Mating Retention	With
Mating Alignment	With
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	.64 mm[.025 in]
Housing Material	Matte



Dimensions

Connector Length	76.2 mm[3 in]
Connector Height	6.38 mm[.257 in]
Connector Width	5.28 mm[.208 in]
Stack Height	6.6 mm, 15.62 mm[.615 in]
PCB Thickness (Recommended)	1.57 mm[.8 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Rating	Listed
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	CSA 1195944, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	7
Packaging Method	Box, Tube

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 5767054-5
MICT,RECPT,190,ASSY,PDNI




TE Part # 5767130-5
MICT,RCPT,190,ASY,GOLD,EXTD

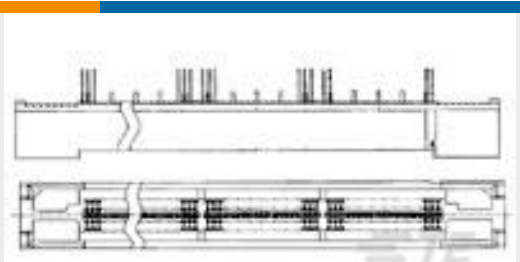


TE Part # 5767143-5
MICT,R/A,RCPT,190,ASY,062,30AU




TE Part # 2-5767004-6
MICTOR RECEPT ASSY, 190 POS.

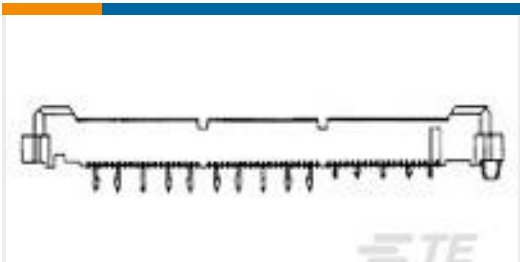


TE Part # 1-5767115-2
MICT,REC,190,ASY,.025 TAPE PKG

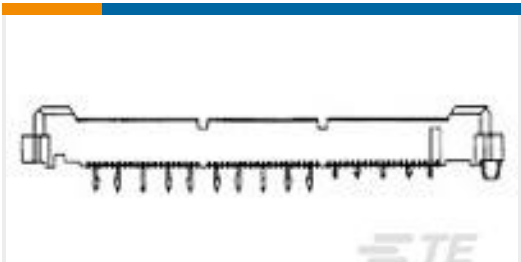


TE Part # 5767061-5
MICT,RECPT,190,ASSY,093,PDNI

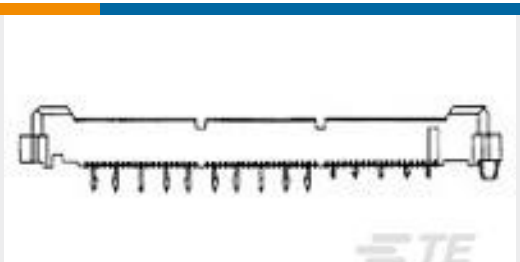

TE Part # 5767081-5
MICT,REC,190,ASY,PDNI,BARBLESS

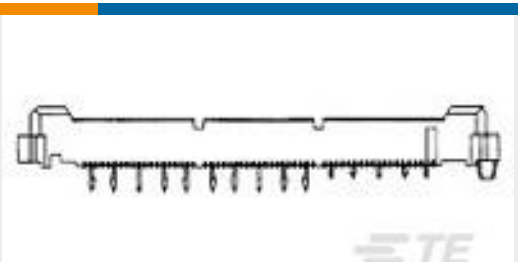

TE Part # 5767089-5
MICTOR,R/A,RECPT,.093,190,ASY

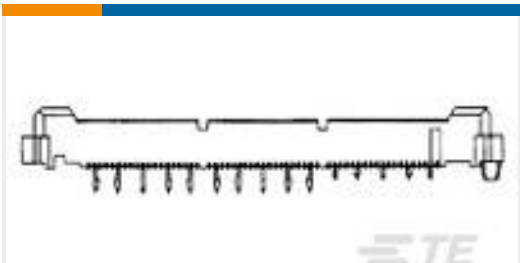

TE Part # 5767115-5
MICT,REC,190,ASY,.025 TAPE PKG



TE Part # 5767181-5
MICT,RECPT,190,ASSY,PDNI

Customers Also Bought






TE Part #1-6609035-1
[10ESK7=F7232 S0](#)



TE Part #63598-1
[MAG-MATE 250 F-TAB TPBR](#)

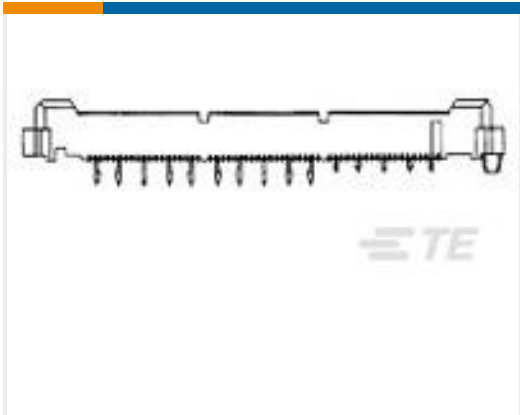

TE Part #5767054-5
[MICT,RECPT,190,ASSY,PDNI](#)



TE Part #4-1879353-8
[RR02 5% 390K AMMO](#)




TE Part #9-2013519-0
[DYNAMIC D3900 H-HDR ASSY 7/10P Z TYPE-A](#)



TE Part #2-2013519-0
[DYNAMIC D3900 H-HDR ASSY 10P Y TYPE-A](#)



TE Part #1-5767007-2
[MICT,260PLUG,190,ASSY,.025,REC](#)

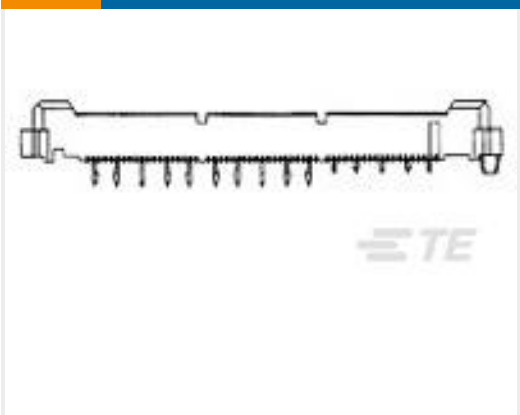

TE Part #2-5767004-6
[MICTOR RECEPT ASSY, 190 POS.](#)



TE Part #1879129-5
[RN 0402 1K24 0.1% 10PPM 1K RL](#)

Documents

Product Drawings

[MICT,260,PLUG,190,ASSY,PDNI](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_5767056-5_C.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5767056-5_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5767056-5_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



MICTOR Interconnection System

English

Fine Pitch Stacking Connectors - 0.635mm MICTOR Connectors

English

Product Specifications

Application Specification

English