
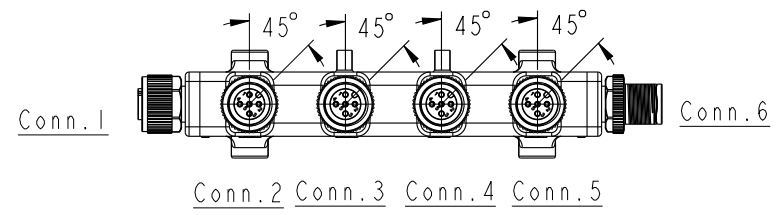
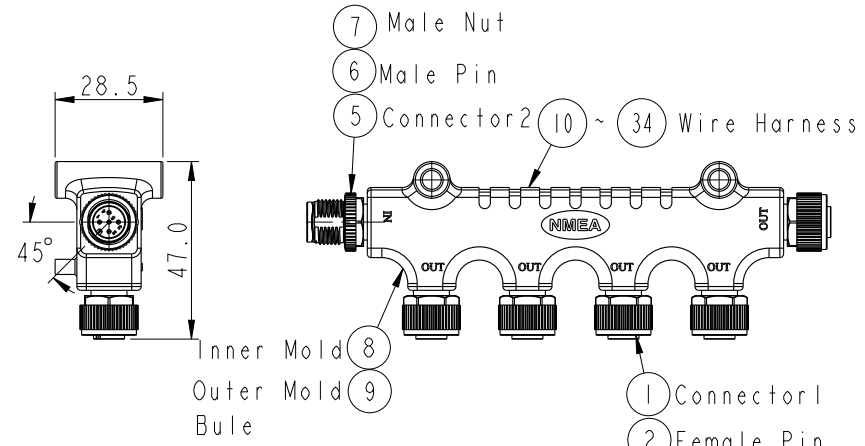



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION


ALTW
CONFIDENTIAL
2016-01-05
R&D DEPT.

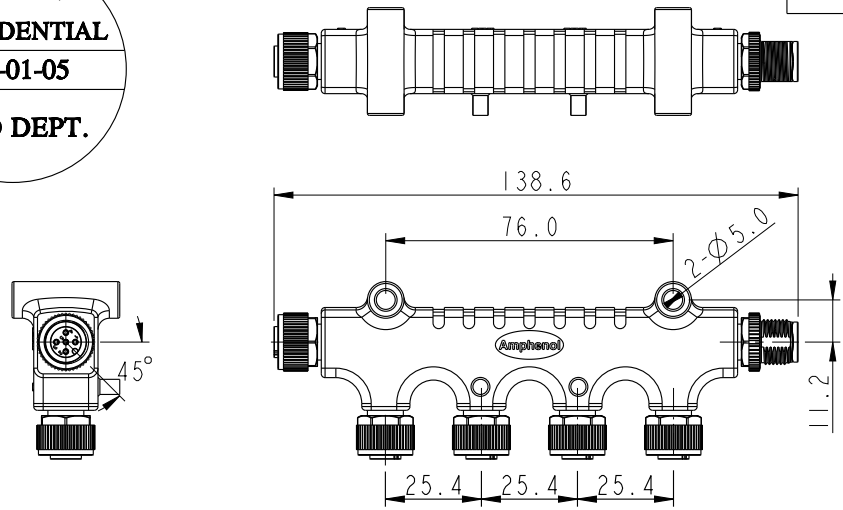

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.03.31
ISSUED



Conn. 1 & 2 & 3 & 4 & 5
Pin Assignments
Front View



Conn. 6
Pin Assignments
Front View

Blue 藍	5	5	5	5	5	5
White 白	4	4	4	4	4	4
Black 黑	3	3	3	3	3	3
Red 紅	2	2	2	2	2	2
Green 綠	1	1	1	1	1	1
Wire Color	Conn. 1	Conn. 2	Conn. 3	Conn. 4	Conn. 5	Conn. 6
Pin Out						

Note:
* Important Dimension To Check.
* Waterproof Rate: IP68
In 1 meter water within 24 hours
* Connector: PU, Black
* Nut: Zinc Alloy, Nickel Plated
* Pin: Copper Alloy, Gold Plated 30u"
* Outer Mold: PU, Blue
* Wire Harness: ULI061, 22AWG

UNIT: mm		TOLERANCE ±0.50mm		TITLE NMEA2000 Micro-C 4-WAY TEE		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO. H-555555-FFFFFM-S001		DRAWN BY Cary		DATE 2016-01-05	
SCALE 1:2		SIZE A4		SHEET 1 OF 1		DWG NO. H-555555-FFFFFM-S001		CHECKED BY Yulong		DATE 2016-01-05		REV. A	
WC-REV. A.1		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-01-05		FMM10702-01-02A1		8	