
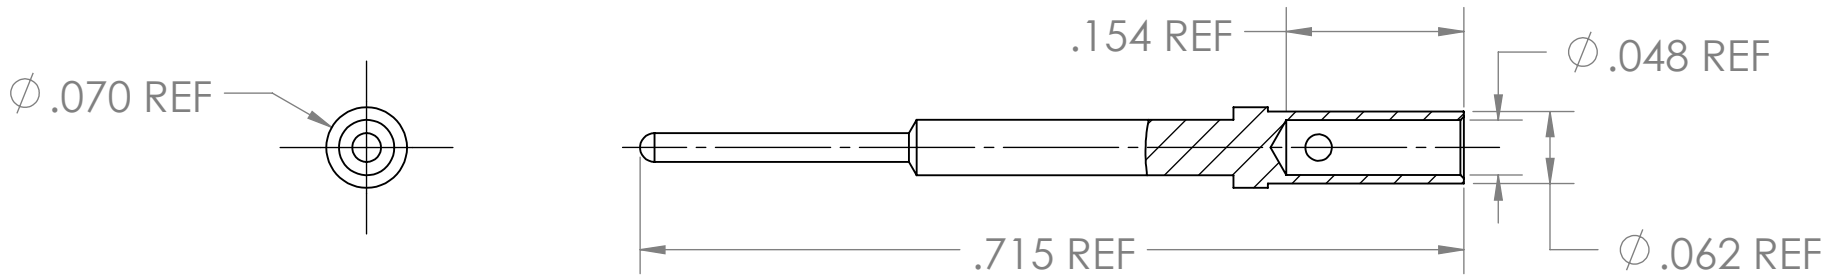
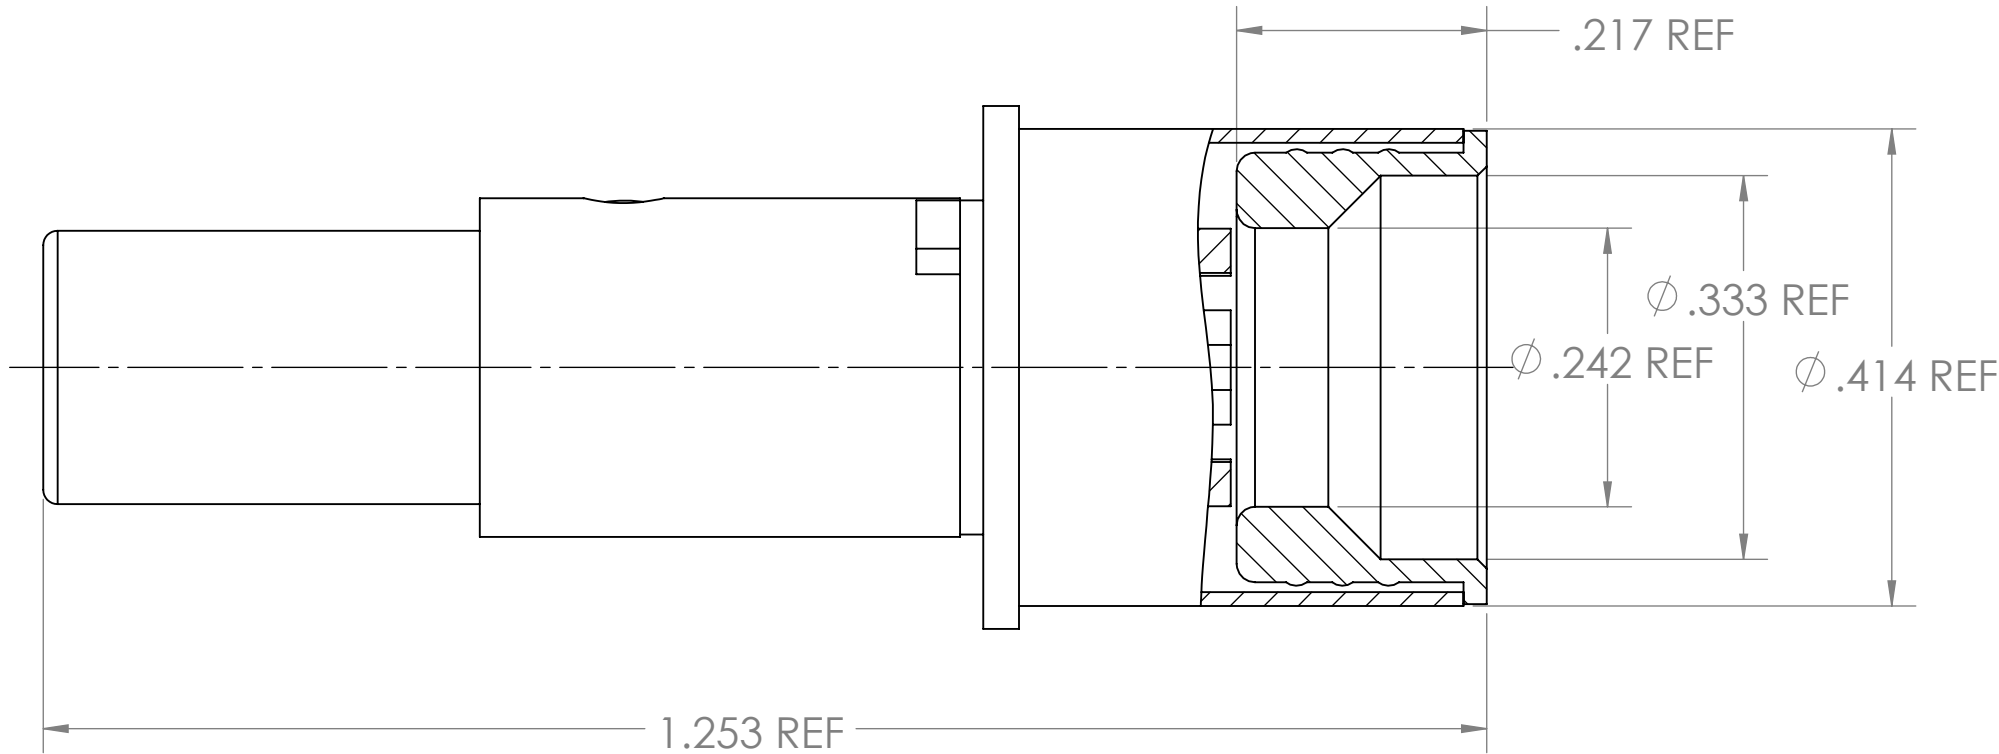



CUSTOMER DRAWING

REVISIONS

ZONE	REV.	DESCRIPTION	DATE
	PA1	INITIAL RELEASE	2021/3/25

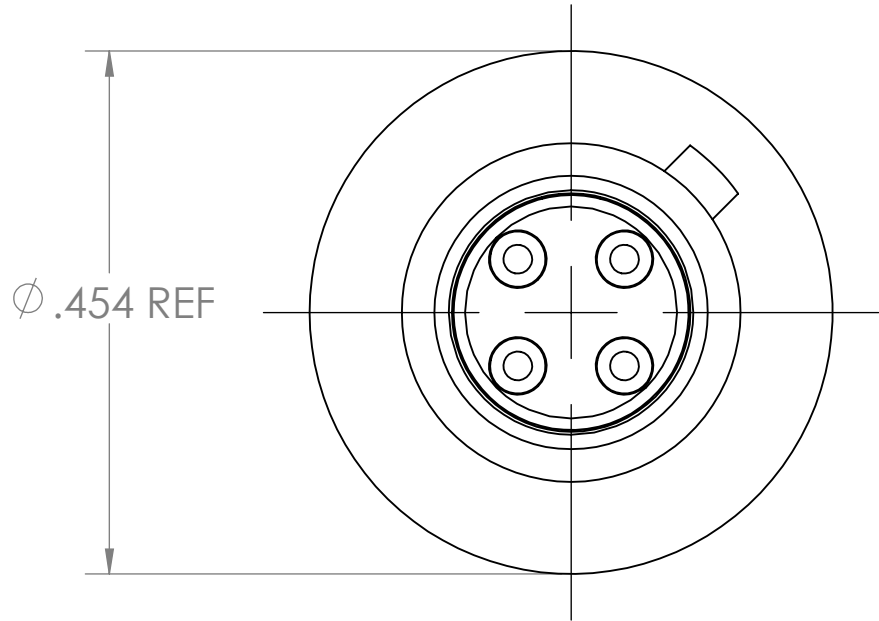

INNER CONTACT
QTY: 4
GOLD PLATED
SCALE 6.000

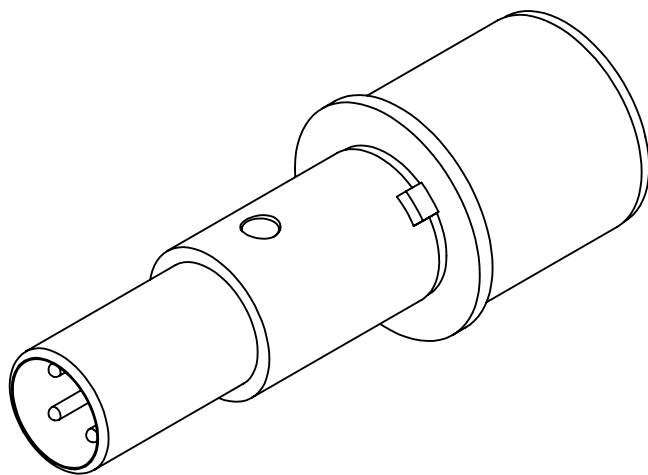

4. THE RATED VOLTAGE: 50V
THE RATED CURRENT: 5A
3. THE RECOMMEND WIRE SIZE : AWG 18~20.
2. THE CONTACT IMPEDANCE RESISTANCE 120OHM.
1. THE REFERENCED PRODUCT SHALL BE COMPLIANT TO RoHS
DIRECTIVE.

NOTES

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND
SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR
ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES
WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

Next Assembly

UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE	<div>AMPHENOL CORPORATION</div> <div>Amphenol Technology (Zhuhai) Co. Ltd.</div> <div>No. 63 Xingnan Road, Sanzao Town, Jinwan, Zhuhai, PRC</div> <div>CONTACT PIN, QUADRAX</div> <div>QX4-20-P-120</div> <div>GOLD PLATED</div> <div>SIZECAGE CODEDOCUMENT NUMBERREV</div> <div>C7782010-765917-12PPA1</div> <div>SCALE: 6:1REF:SHEET 1 OF 1</div>				
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = ± .0005 .XXX = ± .010 .XX = ± .03 .X = ± .1 ANGLES = ± 2° Amphenol STANDARDS PER 9-3800		PREPARED BY:	Bruce Lee	2021/3/25					
		LEAD/PRODUCT ENGINEER:	Bruce Lee						
		ENGINEERING MANAGER:	Ran Xiao						
		PRODUCT GROUP:	C&I						
		AIPG DIVISION:	AIO						
		MATERIAL SPEC		PROCESS SPEC					
		N/A		N/A					
THIRD ANGLE PROJECTION									
