



Screw Clamp Plugs for Pluggable System

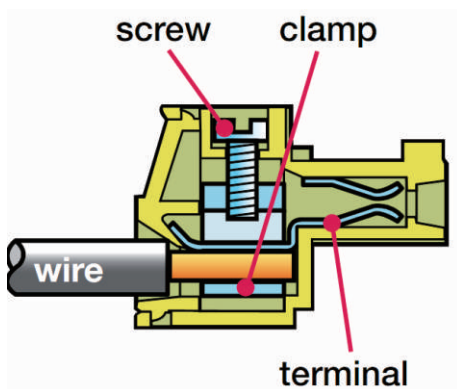


Pitch: 3.5, 3.81, 5.0, 5.08, 6.35, 7.5, 7.62, 10.16, 15.0
Rated Voltage Range(cULus) :160V-600V
Rated Current Range(cULus): 6A-115A

TJ

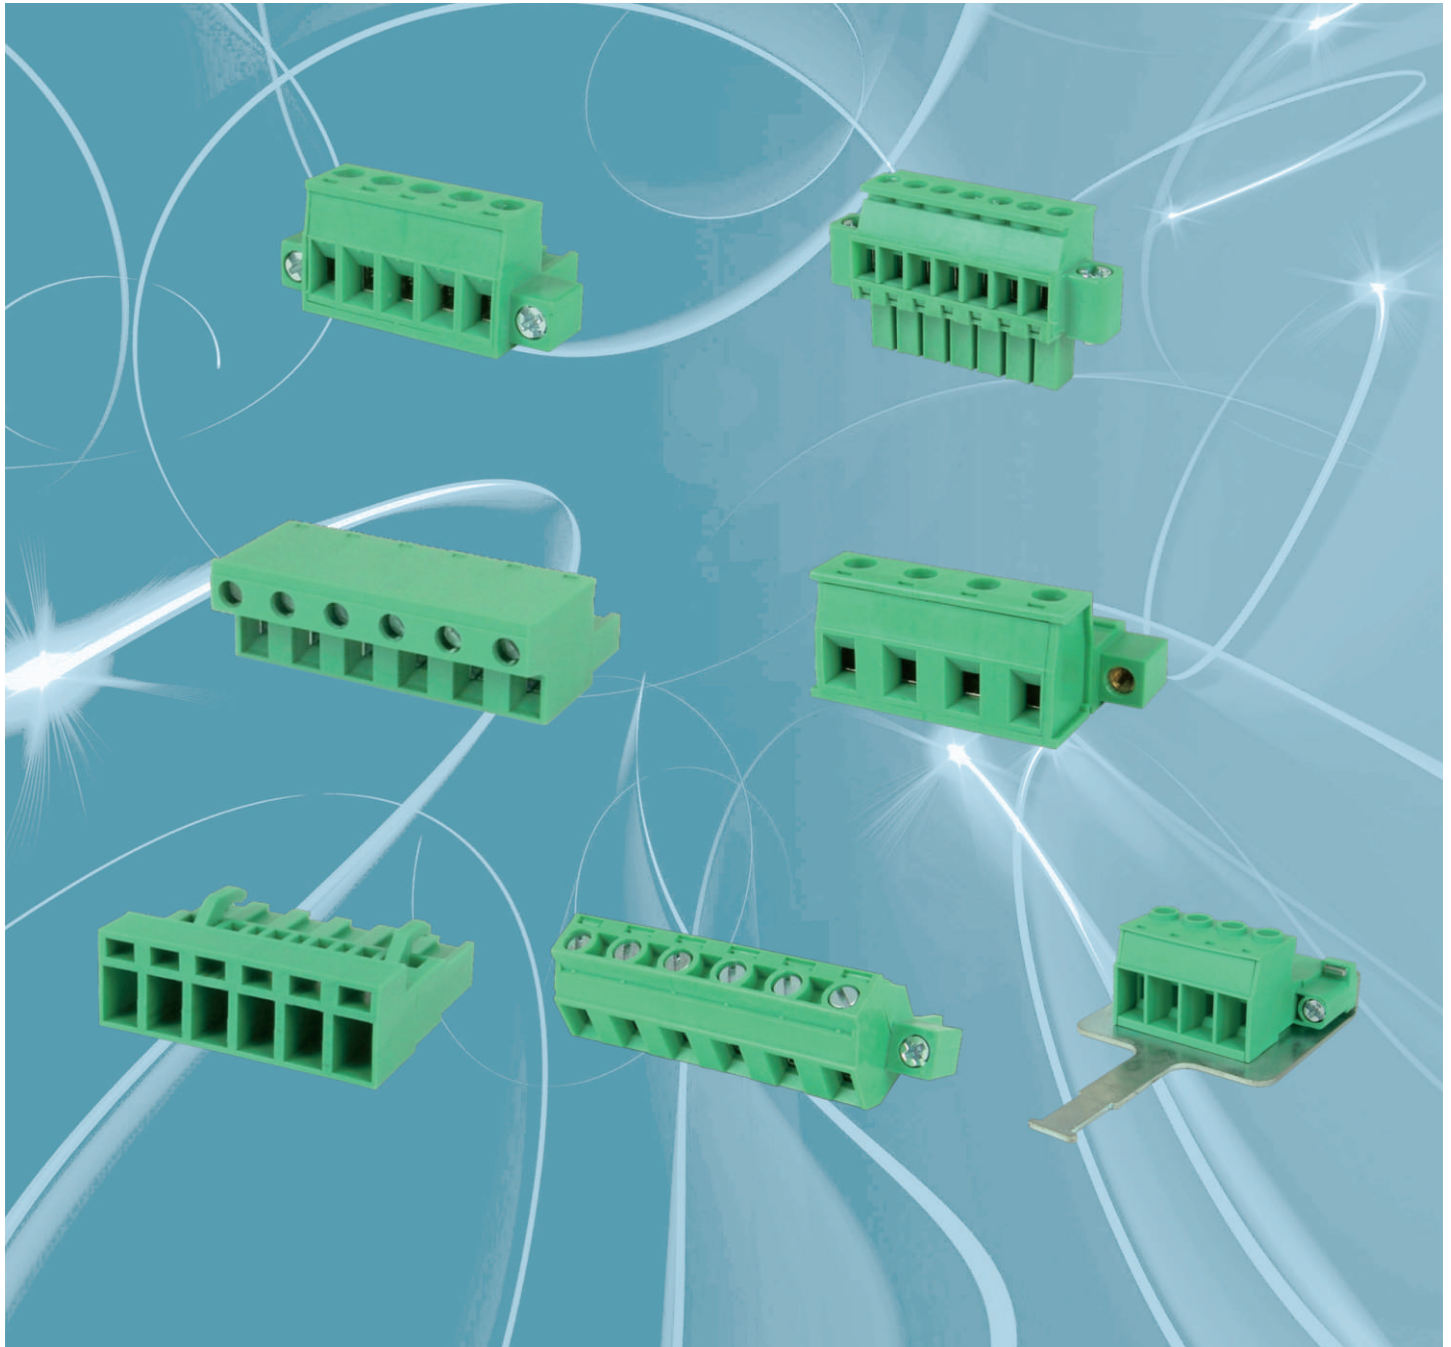


Pitch 3.5mm
Poles 2p~24p
TJxx11530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	

TJ



Pitch 3.5mm
With flange
Poles 2p~24p
TJxx11520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	

TJ




Pitch 3.81mm
Poles 2p~24p
TJxx31530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	

TJ



Pitch 3.81mm
With flange
Poles 2p~24p
TJxx31520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	

TJ



Pitch 3.5/3.81 mm
With handle
Poles 2p~24p
TJxx1/31540000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	

TJ



Pitch 5.0/5.08 mm
With handle
Poles 2p~24p
TJxx7/51540000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 5.0mm
Contact on down side
Poles 2p~24p
TJxx7150000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque:	5Lb-In	0.5Nm	0.56Nm

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV 2.5KV 2.5KV
Safety Approval:	ULus VDE TÜV

TJ



Pitch 5.0mm
With flange, Contact on down side
Poles 2p~24p
TJxx71520000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque:	5Lb-In	0.5Nm	0.56Nm

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV 2.5KV 2.5KV
Safety Approval:	ULus VDE TÜV

TJ



Pitch 5.0mm
Contact on up side
Poles 2p~24p
TJxx71560000G*
Number of poles

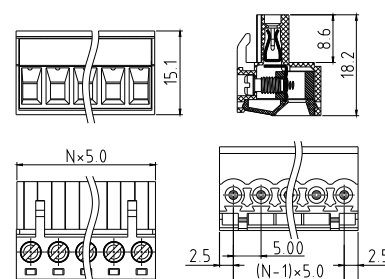


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	ULus

TJ



Pitch 5.0mm
With flange, Contact on up side
Poles 2p~24p
TJxx71570000G*
Number of poles

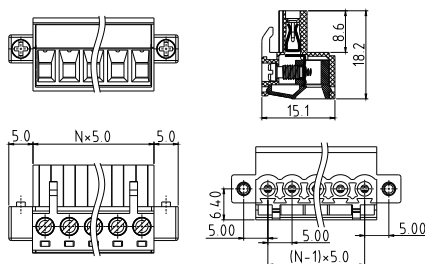


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	ULus

TJ



Pitch 5.08mm
Contact on down side
Poles 2p~24p
TJxx51530000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque:	5Lb-In	0.5Nm	0.56Nm

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV 2.5KV 2.5KV
Safety Approval:	ULus VDE TÜV

TJ



Pitch 5.08mm
With flange, Contact on down side
Poles 2p~24p
TJxx51520000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque:	5Lb-In	0.5Nm	0.56Nm

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV 2.5KV 2.5KV
Safety Approval:	ULus VDE TÜV

TJ



Pitch 5.08mm
Contact on up side
Poles 2p~24p
TJxx51560000G*
Number of poles

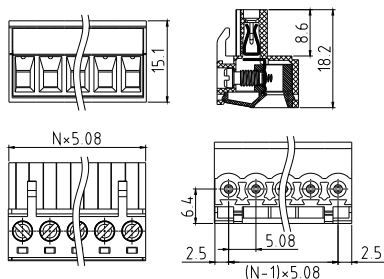


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 5.08mm
With flange, Contact on up side
Poles 2p~24p
TJxx51570000G*
Number of poles

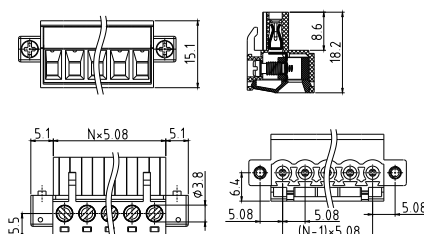


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 7.5mm
Poles 2p~16p
TJxxA1500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 7.5mm
With flange
Poles 2p~16p
TJxxA1520000G*
Number of poles

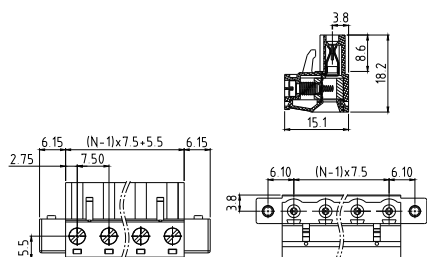


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ




Pitch 7.62mm
Poles 2p~16p
TJxx01500000G*
Number of poles

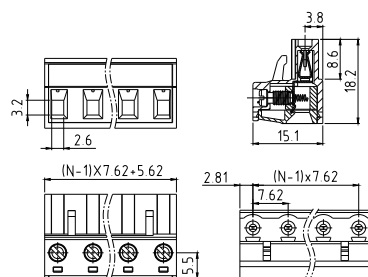


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 7.62mm
With flange
Poles 2p~16p
TJxx01520000G*
Number of poles

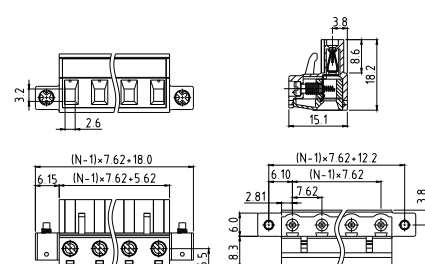


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E2



Pitch 3.5mm
Poles 2p~24p
E2xx11300000G*
Number of poles



Electrical: cULus

Voltage rating: 300V

Current rating: 10A

Wire range:

Solid wire(AWG): 14-28

Stranded wire(AWG): 14-28

Torque(Lb-In) : 1.7

Screw: M2

Wire strip length: 6-7mm


Withstanding Voltage: 1.6KV

Safety Approval:

VD



Pitch 3.81mm
Poles 2p~24p
VDxx31500000G*
Number of poles

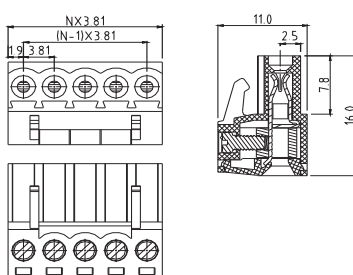

Electrical: cULus

Voltage rating: 300V

Current rating: 8A

Wire range:

Solid wire(AWG): 16-28

Stranded wire(AWG): 16-28

Torque(Lb-In) : 1.7

Screw: M2

Wire strip length: 6-7mm


Withstanding Voltage: 1.6KV

Safety Approval:

VD



Pitch 3.81mm
With flange
Poles 2p~24p
VDxx31520000G*
Number of poles

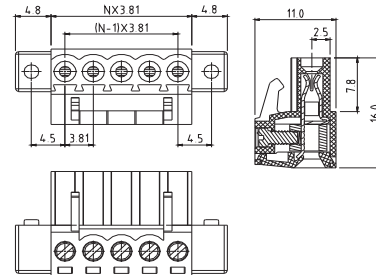

Electrical: cULus

Voltage rating: 300V

Current rating: 8A

Wire range:

Solid wire(AWG): 16-28

Stranded wire(AWG): 16-28

Torque(Lb-In) : 1.7

Screw: M2

Wire strip length: 6-7mm


Withstanding Voltage: 1.6KV

Safety Approval:

K8



Pitch 3.81mm
Without flange
Poles 2p~24p
K8xx31500000G*
Number of poles

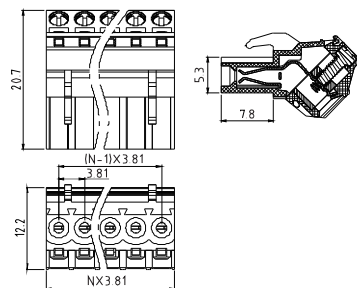

Electrical: cULus

Voltage rating: 300V

Current rating: 8A

Wire range:

Solid wire(AWG): 16-28

Stranded wire(AWG): 16-28

Torque(Lb-In) : 1.7

Screw: M2

Wire strip length: 8-9mm


Withstanding Voltage: 1.6KV

Safety Approval:

K8



Pitch 3.81mm
With flange
Poles 2p~24p
K8xx31520000G*
Number of poles

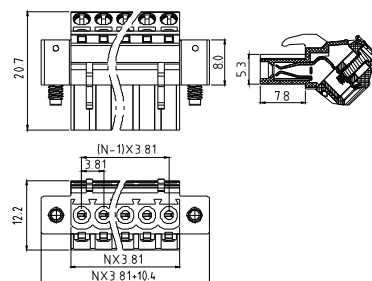

Electrical: cULus

Voltage rating: 300V

Current rating: 8A

Wire range:

Solid wire(AWG): 16-28

Stranded wire(AWG): 16-28

Torque(Lb-In) : 1.7

Screw: M2

Wire strip length: 8-9mm


Withstanding Voltage: 1.6KV

Safety Approval:

TS



Pitch 3.5mm
Hook on entry side
Poles 2p~24p
TSxx115A0000G*
Number of poles

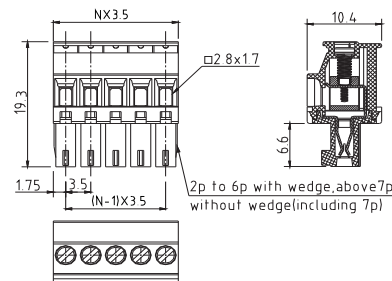

Electrical: cULus VDE

Voltage rating: 300V 300V

Current rating: 8A 10A

Wire range: 1.5mm²

Solid wire(AWG): 16-28

Stranded wire(AWG): 16-28

Torque : 1.7Lb-In 0.2N.m

Screw: M2

Wire strip length: 6-7mm


Withstanding Voltage: 1.6KV 2.5KV

Safety Approval:

TS



Pitch 3.5mm
W/F, Hook on entry side
Poles 2p~24p
TSxx115C0000G*
Number of poles

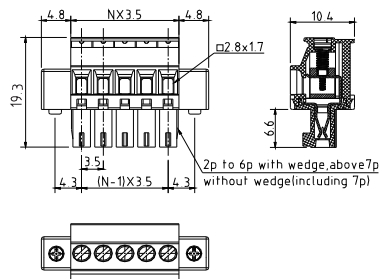


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:1.6KV	2.5KV	
Safety Approval:		

TS



Pitch 3.5mm
Hook on back side
Poles 2p~24p
TSxx115B0000G*
Number of poles

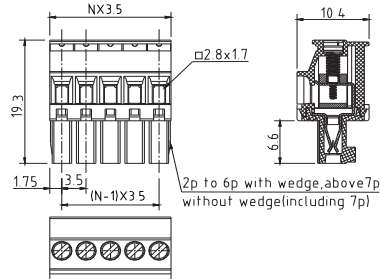


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:1.6KV	2.5KV	
Safety Approval:		

TS



Pitch 3.5mm
W/F, Hook on back side
Poles 2p~24p
TSxx115D0000G*
Number of poles

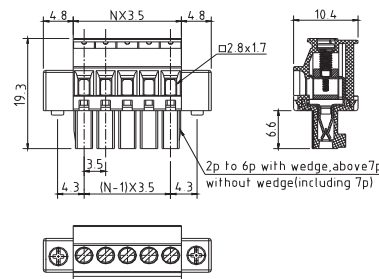


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:1.6KV	2.5KV	
Safety Approval:		

TS



Pitch 3.81mm
Hook on entry side
Poles 2p~24p
TSxx315A0000G*
Number of poles

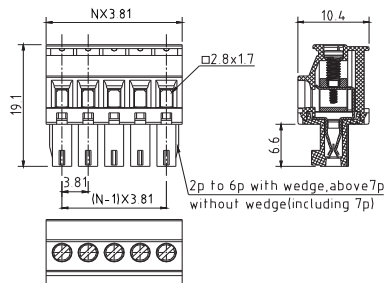


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:1.6KV	2.5KV	
Safety Approval:		

TS



Pitch 3.81mm
W/F, Hook on entry side
Poles 2p~24p
TSxx315C0000G*
Number of poles

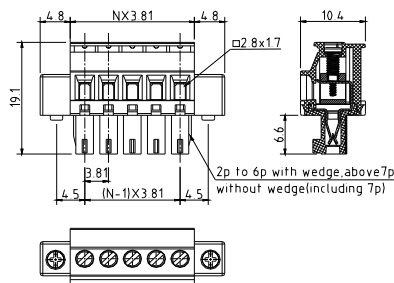


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:1.6KV	2.5KV	
Safety Approval:		

TS



Pitch 3.81mm
Hook on back side
Poles 2p~24p
TSxx315B0000G*
Number of poles

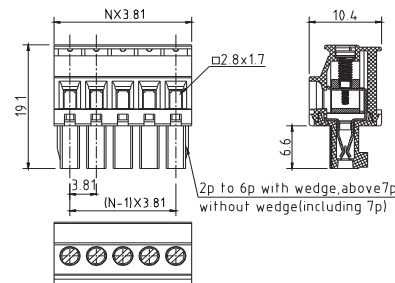


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:1.6KV	2.5KV	
Safety Approval:		

TS



Pitch 3.81mm
W/F, Hook on back side
Poles 2p~24p
TSxx315D0000G*
Number of poles

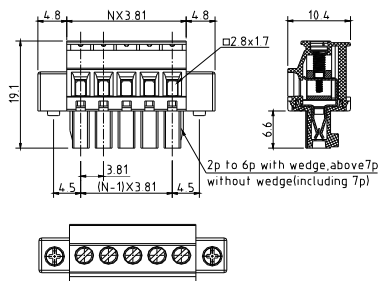


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	cULus VDE

TS



Pitch 5.0mm
Hook on entry side
Poles 2p~24p
TSxx715A0000G*
Number of poles

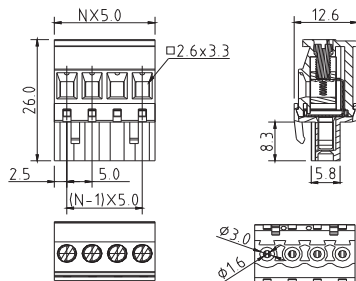


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:			

TS



Pitch 5.0mm
W/F, Hook on entry side
Poles 2p~24p
TSxx715C0000G*
Number of poles

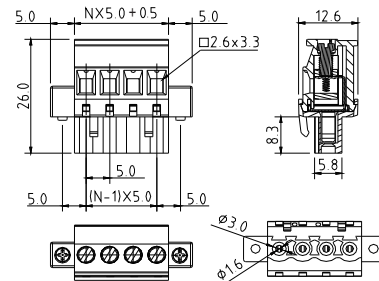


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:			

TS



Pitch 5.0mm
Hook on back side
Poles 2p~24p
TSxx715B0000G*
Number of poles

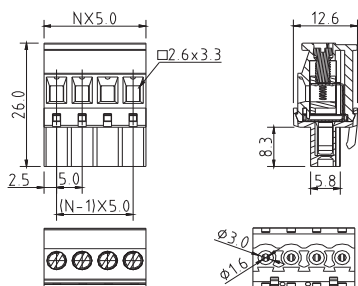


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:	 us		

TS



Pitch 5.0mm
W/F, Hook on back side
Poles 2p~24p
TSxx715D0000G*
Number of poles

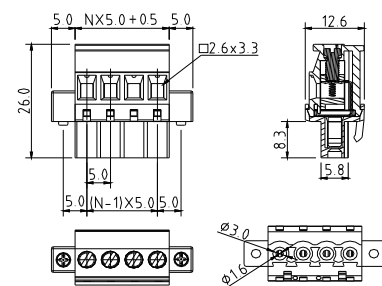


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:			

TS



Pitch 5.08mm
Hook on entry side
Poles 2p~24p
TSxx515A0000G*
Number of poles

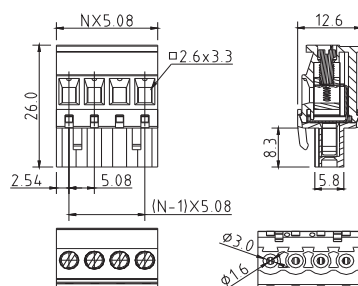


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

TS



Pitch 5.08mm
W/F, Hook on entry side
Poles 2p~24p
TSxx515C0000G*
Number of poles

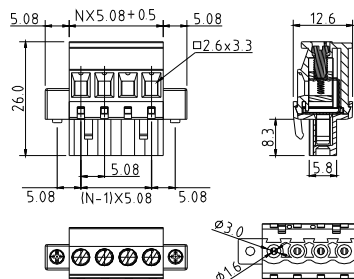


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

TS



Pitch 5.08mm
Hook on back side
Poles 2p~24p
TSxx515B0000G*
Number of poles

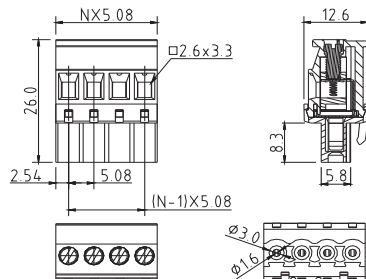


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

TS




Pitch 5.08mm
W/F, Hook on back side
Poles 2p~24p
TSxx515D0000G*
Number of poles

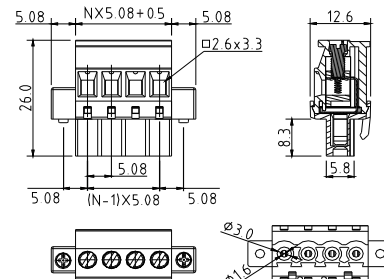


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

TS




Pitch 7.5mm
Hook on entry side
Poles 2p~16p
TSxxA15A0000G*
Number of poles

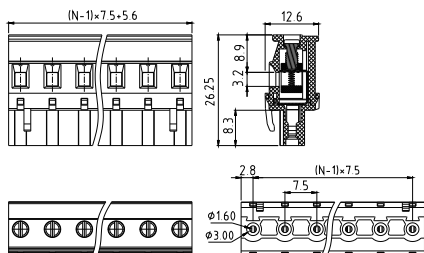


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS



Pitch 7.5mm
W/F, Hook on entry side
Poles 2p~16p
TSxxA15C0000G*
Number of poles

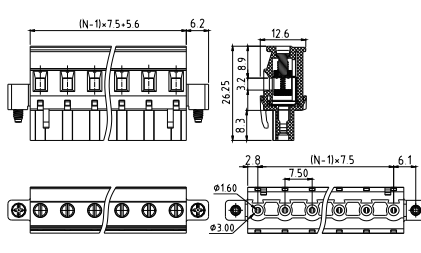


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS



Pitch 7.5mm
Hook on back side
Poles 2p~16p
TSxxA15B0000G*
Number of poles

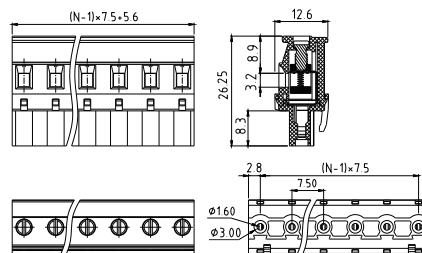


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS




Pitch 7.5mm
W/F, Hook on back side
Poles 2p~16p
TSxxA15D0000G*
Number of poles

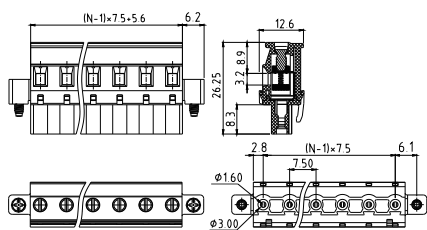


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

TS



Pitch 7.62mm
Hook on entry side
Poles 2p~16p
TSxx015A0000G*
Number of poles

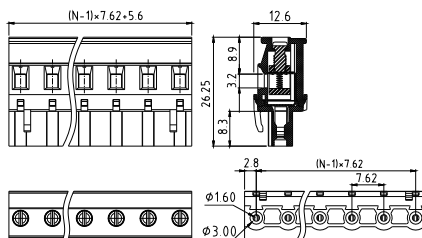


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

TS




Pitch 7.62mm
W/F, Hook on entry side
Poles 2p~16p
TSxx015C0000G*
Number of poles

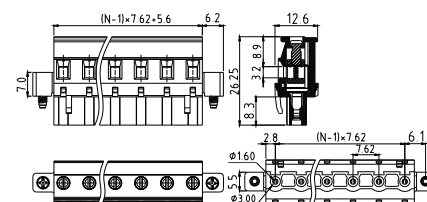


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

TS



Pitch 7.62mm
Hook on back side
Poles 2p~16p
TSxx015B0000G*
Number of poles

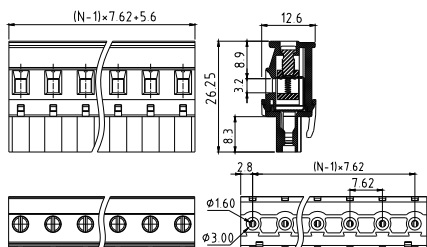


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

TS




Pitch 7.62mm
W/F, Hook on back side
Poles 2p~16p
TSxx015D0000G*
Number of poles

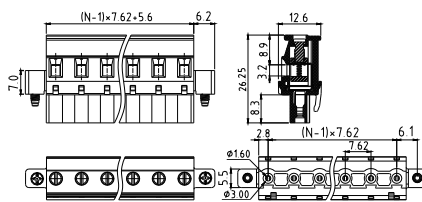


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

VM



Pitch 3.5mm
Poles 2p~24p
VMxx15500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	
Safety Approval:	

VM




Pitch 3.5mm-W/F
Poles 2p~24p
VMxx15520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7
Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VM



Pitch 3.81mm
Poles 2p~24p
VMxx35500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V(II/2)
Current rating:	10A	10A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque:	1.7Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	
Rated impulse voltage(II/2):		2.5KV
Safety Approval:		

VM




Pitch 3.81mm-W/F
Poles 2p~24p
VMxx35520000G*
Number of poles

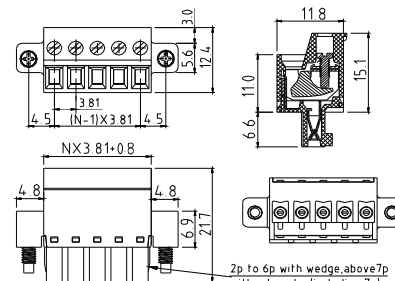


Electrical:	cULus	VDE
Voltage rating:	300V	300V(II/2)
Current rating:	10A	10A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque:	1.7Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	
Rated impulse voltage(II/2):		2.5KV
Safety Approval:		

VM




Pitch 5.0mm
Poles 2p~24p
VMxx75500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	3.5Lb-In	0.4N.m
Screw:	M2.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VM



Pitch 5.0mm-W/F
Poles 2p~24p
VMxx75500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	3.5Lb-In	0.4N.m
Screw:	M2.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VM




Pitch 5.08mm
Poles 2p~24p
VMxx55500000G*
Number of poles




Electrical:	cULus	TUV	VDE
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:		0.34-2.5mm ² /0.34-2.5mm ²	
Solid wire(AWG):	12-22		
Stranded wire(AWG):	12-22		
Torque :	3.5Lb-In	0.4N.m	0.4N.m
Screw:	M2.5		
Wire strip length:	8-9mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

VM




Pitch 5.08mm-W/F
Poles 2p~24p
VMxx55520000G*
Number of poles

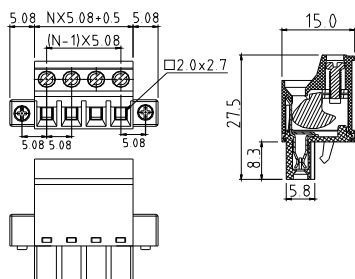


Electrical:	cULus	TUV	VDE
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	0.34-2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-22		
Stranded wire(AWG):	12-22		
Torque :	3.5Lb-In	0.4N.m	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VM



Pitch 5.08mm
Low profile
Poles 2p~24p
VMxx55510000G*
Number of poles

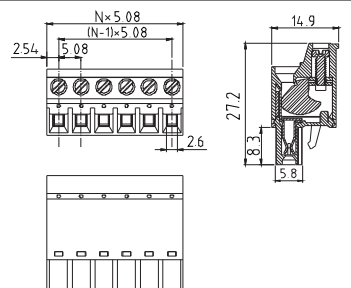


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VM




Pitch 5.08mm
W/F, Low profile
Poles 2p~24p
VMxx55530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VM




Pitch 7.5mm
Low profile
Poles 2p~16p
VMxxA5510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VM



Pitch 7.5mm
W/F, Low profile
Poles 2p~16p
VMxxA5530000G*
Number of poles

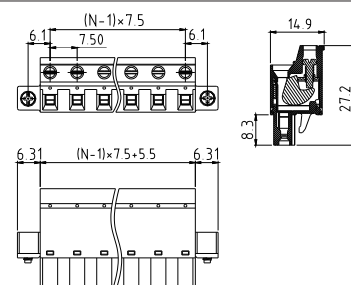


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VM




Pitch 7.62mm
Low profile
Poles 2p~16p
VMxx05510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VM



Pitch 7.62mm
W/F, Low profile
Poles 2p~16p
VMxx05530000G*
Number of poles

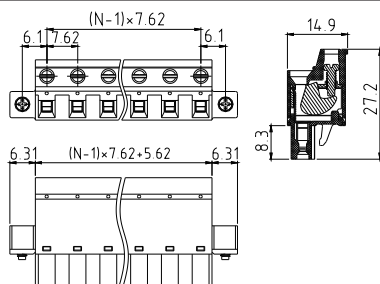


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 3.81mm
Poles 2p~24p
V8xx31500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 3.81mm
Flange with nut
Poles 2p~24p
V8xx31510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 3.81mm
Flange with screw
Poles 2p~24p
V8xx31520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 5.08mm
Poles 2p~24p
V8xx51500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In):	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 5.08mm
Flange with nut
Poles 2p~24p
V8xx51510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In):	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 5.08mm
Flange with screw
Poles 2p~24p
V8xx51520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 5.08mm-Flange with nut
Through the panel type
Poles 2p~18p
V8xx51530000G*
Number of poles

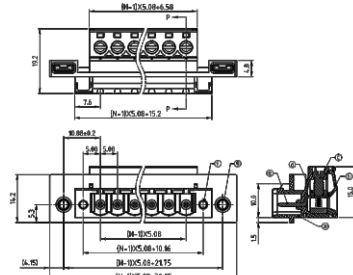


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 7.62mm
Poles 2p~16p
V8xx01500000G*
Number of poles

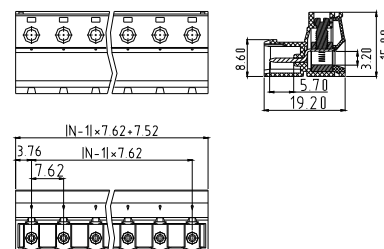


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 7.62mm
Flange with nut
Poles 2p~16p
V8xx01520000G*
Number of poles

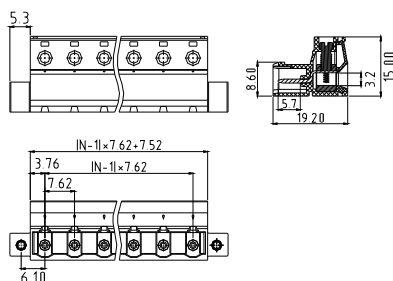


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8



Pitch 7.62mm
Flange with screw
Poles 2p~16p
V8xx01520000G*
Number of poles

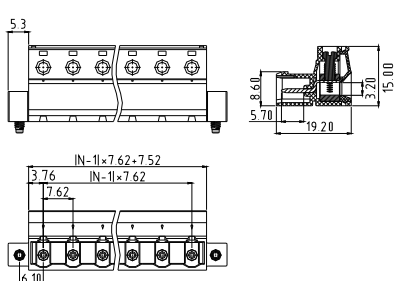


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI



Pitch 3.81mm
Poles 2p~24p
K1xx30500000G*
Number of poles
Match with AO 3.81 type pin

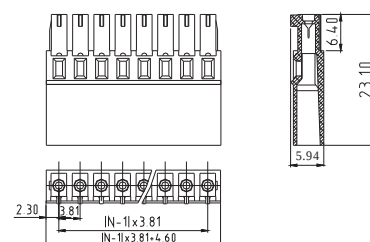


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI



Pitch 3.81mm-W/F
Poles 2p~24p
KIxx30520000G*
Number of poles
Match with AO 3.81 type pin



Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KI



Pitch 3.81mm
With high profile
Poles 2p~24p
KIxx30510000G*
Number of poles
Match with AO 3.81 type pin



Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KI



Pitch 3.81mm
W/F, With high profile
Poles 2p~24p
KIxx30530000G*
Number of poles
Match with AO 3.81 type pin



Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KI



Pitch 5.08mm
Poles 2p~24p
KIxx50520000G*
Number of poles
Match with AO 5.08 type pin



Electrical:	cULus
Voltage rating:	300V 300V
Current rating:	8A 10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20 14-16 (0.5-1.0mm ²) (1.5-2.5mm ²)
Torque(Lb-In) :	


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KI



Pitch 5.08mm-W/F
Poles 2p~24p
KIxx50520000G*
Number of poles
Match with AO 5.08 type pin



Electrical:	cULus
Voltage rating:	300V 300V
Current rating:	8A 10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20 14-16 (0.5-1.0mm ²) (1.5-2.5mm ²)
Torque(Lb-In) :	


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KI



Pitch 5.08mm
With high profile
Poles 2p~24p
KIxx50510000G*
Number of poles
Match with AO 5.08 type pin



Electrical:	cULus
Voltage rating:	300V 300V
Current rating:	8A 10A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20 14-16 (0.5-1.0mm ²) (1.5-2.5mm ²)
Torque(Lb-In) :	

Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KI



Pitch 5.08mm
W/F, With high profile
Poles 2p~24p
KIxx50530000G*
Number of poles
Match with AO 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):	18-20	14-16
	(0.5-1.0mm ²)	(1.5-2.5mm ²)
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	

KV



Pitch 5.08mm
With hook & Low profile
Poles 2p~24p
KVxx50500000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus)pending	

KV



Pitch 5.08mm
Flange with screw & Low profile
Poles 2p~24p
KVxx50510000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus)pending	

KV



Pitch 5.08mm
Flange with nut & Low profile
Poles 2p~24p
KVxx50520000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus)pending	

KV



Pitch 5.08mm
With hook & High profile
Poles 2p~24p
KVxx50530000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus)pending	

KV



Pitch 5.08mm
Flange with screw & High profile
Poles 2p~24p
KVxx50540000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus)pending	

KV




Pitch 5.08mm
Flange with nut & High profile
Poles 2p~24p
KVxx50550000G*
Match with AR 5.08 type pin




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range: 1.5-2.5mm²
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

AO



Match with KI 3.81
AO0000000000G*
With wire range(0.5-1.0mm²)

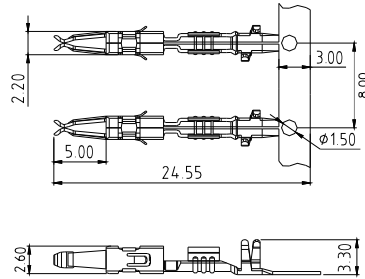


Used Wire range: 0.5-1.0mm²
Stranded wire(AWG): 18-20
Current is 6A to 8A
Wire strip length: 4.0mm
Core diameter including insulation:0.18 mm ... 0.25 mm

AO



Match with KI 5.08
AO0000100000G*
With wire range(0.5-1.0mm²)




Used Wire range: 0.5-1.0mm²
Stranded wire(AWG): 18-20
Current up to 10A
Wire strip length: 4.0mm
Core diameter including insulation:1.8 mm ... 2.1 mm

AO



Match with KI 5.08
AO0000200000G*
With wire range(1.5-2.5mm²)




Used Wire range: 1.5-2.5mm²
Stranded wire(AWG): 14-16
Current up to 12A
Wire strip length: 4.0mm
Core diameter including insulation:2.11 mm ... 3.1 mm

AR



Match with KV 5.08
AR0000000000G*
With wire range(1.5-2.5mm²)




Used Wire range: 1.5-2.5mm²
Stranded wire(AWG): 14-16
Current up to 12A
Wire strip length: 7.0mm
Core diameter including insulation:2.11 mm ... 3.1 mm

EZ



Pitch 5.0mm
Poles 2p~24p
EZxx71500000G*
Number of poles

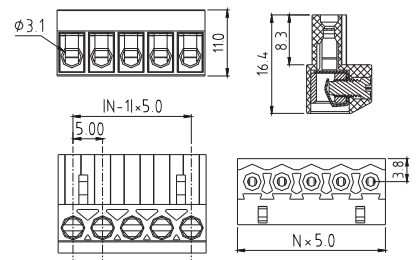


Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Wire range:
Solid wire(AWG): 12-22
Stranded wire(AWG): 12-22
Torque(Lb-In) : 4.3

Screw: M3
Wire strip length: 7-8mm
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EZ




Pitch 5.0mm-W/F
Poles 2p~24p
EZxx71520000G*
Number of poles

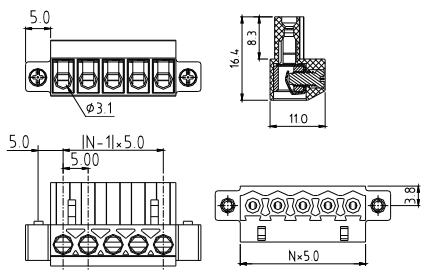


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EZ



Pitch 5.08mm
Poles 2p~24p
EZxx51500000G*
Number of poles

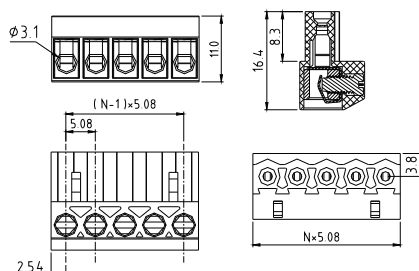


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EZ



Pitch 5.08mm-W/F
Poles 2p~24p
EZxx51520000G*
Number of poles

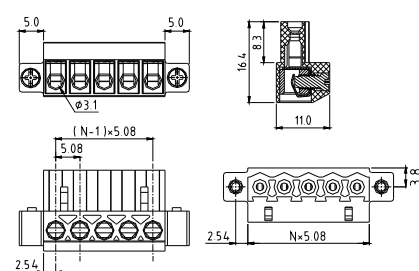


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VR



Pitch 5.08mm
Contact on down side
Poles 2p~24p
VRxx51500000G*
Number of poles

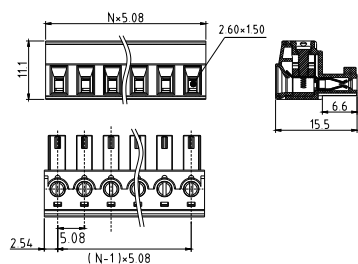


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	2.0

Screw:	M2
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VR




Pitch 5.08mm-W/F
Contact on down side
Poles 2p~24p
VRxx51520000G*
Number of poles

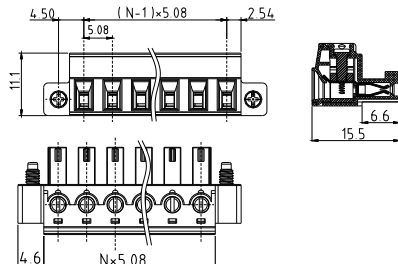


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	2.0

Screw:	M2
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VR




Pitch 5.08mm
Contact on up side
Poles 2p~24p
VRxx51510000G*
Number of poles

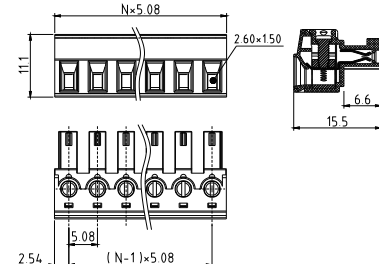


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	2.0

Screw:	M2
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VR



Pitch 5.08mm-W/F
Contact on up side
Poles 2p~24p
VRxx51530000G*
Number of poles

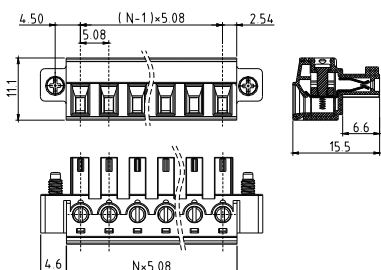


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	2.0

Screw:	M2
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM



Pitch 5.0mm
Poles 2p~24p
EMxx71500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM



Pitch 5.0mm-W/F
Poles 2p~24p
EMxx71520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM



Pitch 5.08mm
Poles 2p~24p
EMxx51500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM



Pitch 5.08mm-W/F
Poles 2p~24p
EMxx51520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM



Pitch 7.5mm
Poles 2p~16p
EMxxA1500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM



Pitch 7.5mm-W/F
Poles 2p~16p
EMxxA1520000G*
Number of poles

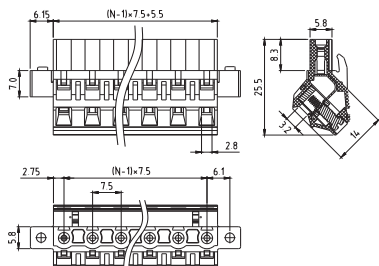


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EM



Pitch 7.62mm
Poles 2p~16p
EMxx01500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	4.0Lb-In	0.45N.m
Screw:	M3	
Wire strip length:	7-8mm	
Withstanding Voltage:	1.6KV	
Impulse Voltage(II/2):		6KV
Safety Approval:		

EM



Pitch 7.62mm-W/F
Poles 2p~16p
EMxx01520000G*
Number of poles

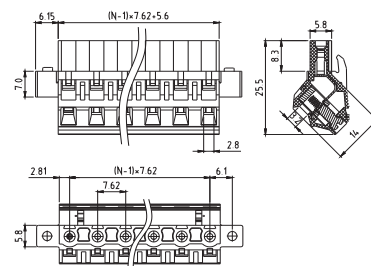


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	4.0Lb-In	0.45N.m
Screw:	M3	
Wire strip length:	7-8mm	
Withstanding Voltage:	1.6KV	
Impulse Voltage(II/2):		6KV
Safety Approval:		

EY



Pitch 5.08mm
Hook on entry side
Poles 2p~24p
EYxx510A0000G*
Number of poles

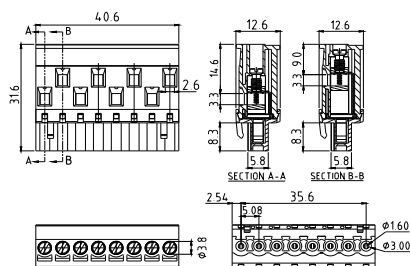


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0
Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

K5



Pitch 5.08mm(Without flange)
Poles 2p~24p
K5xx51500000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	() pending

K5



Pitch 5.08mm(With flange)
Poles 2p~24p
K5xx51510000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	() pending

K5



Pitch 5.08mm(With latch)
Poles 2p~24p
K5xx51520000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

VH



Pitch 5.08mm
Poles 2p~24p
VHxx51500000G*
Number of poles

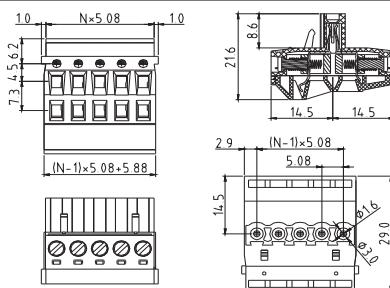


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In):	4.3
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

VH




Pitch 5.08mm-W/F
Poles 2p~24p
VHxx51520000G*
Number of poles

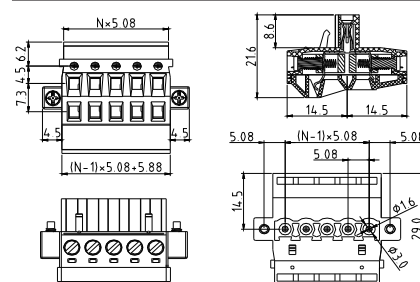


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In):	4.3
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

E5 - Screw type



Pitch 6.35mm
Poles 2*3p~2*24p
E5xx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	14-20
Stranded wire(AWG):	14-20
Torque:	5.0Kgf.cm

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.5KV
Safety Approval:	(cULus) pending

VB



Pitch 7.62mm
Poles 2p~16p
VBxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In):	4.5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

VB



Pitch 7.62mm-W/F
Poles 2p~16p
VBxx01520000G*
Number of poles

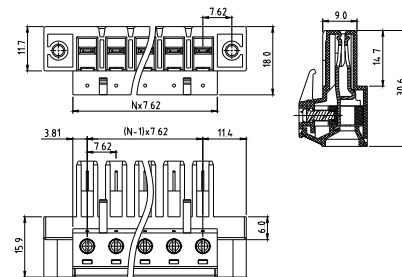


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In):	4.5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

ET



Pitch 7.62mm
Poles 2p~16p
ETxx02500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:	0.2-6mm ²	
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque:	7Lb-In	0.8N.m

Screw:	M3.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	6KV
Safety Approval:		

ET



Pitch 7.62mm-W/F
Poles 2p~16p
ETxx02520000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:	0.2-6mm ²	
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque :	7Lb-In	0.8N.m

Screw:	M3.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	6KV
Safety Approval:		

ET



Pitch 7.62mm-W/F(with handle)
Poles 3p/4p
ETxx02530000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:	0.2-6mm ²	
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque :	7Lb-In	0.8N.m

Screw:	M3.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	6KV
Safety Approval:		

KT



Pitch 7.62mm
Poles 2p~16p
KTxx01500000G*
Number of poles

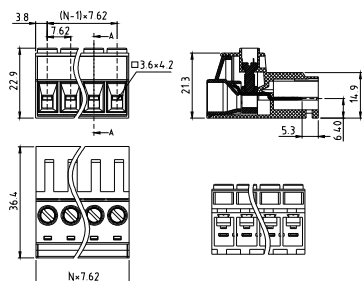


Electrical:	cULus
Voltage rating:	300V(KS) 600V(ET)
Current rating:	41A 41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	2.2KV
Safety Approval:		

KT



Pitch 7.62mm
With flange screw type
Poles 2p~16p
KTxx01540000G*
Number of poles

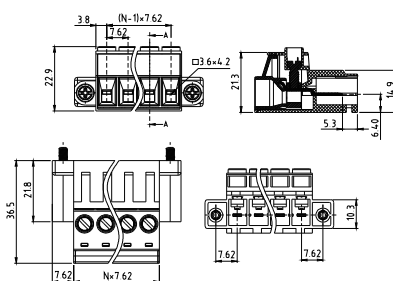


Electrical:	cULus
Voltage rating:	300V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KT




Pitch 7.62mm
With flange screw type & W/handle
Poles 3p/4p
KTxx01550000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KT




Pitch 7.62mm
With flange nut type
Poles 2p~16p
KTxx01520000G*
Number of poles

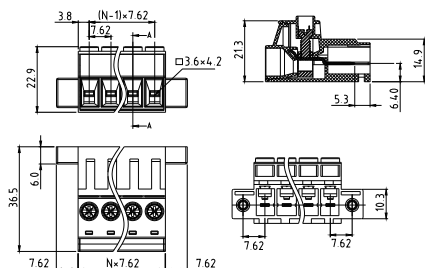


Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KT



Pitch 7.62mm
With flange nut type & W/handle
Poles 3p/4p
KTxx01530000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

EV



Pitch 10.16mm
Poles 2p~12p
EVxx61500000G*
Number of poles

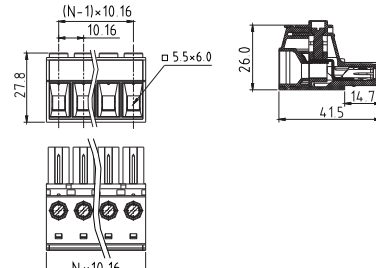


Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	10.4

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EV



Pitch 10.16mm-W/F
Poles 2p~12p
EVxx61510000G*
Number of poles

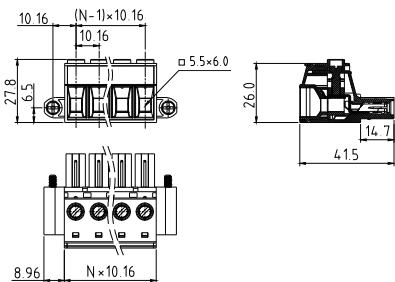


Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	10.4

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EV



Pitch 10.16mm-W/F(With handle)
Poles 3p/4p
EVxx61520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	10.4

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KK



Pitch 10.16mm
Poles 2p~12p
KKxx61500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V(KL) 600V(KJ)
Current rating:	55A 55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV 2.2KV
Safety Approval:	cULus

KK



Pitch 10.16mm-Flange with screw
Poles 2p~12p
KKxx61510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KK




Pitch 10.16mm
Flange with screw(With handle)
Poles 3p/4p
KKxx61520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KK




Pitch 10.16mm-Flange with nut
Poles 2~12p
KKxx61530000G*
Number of poles

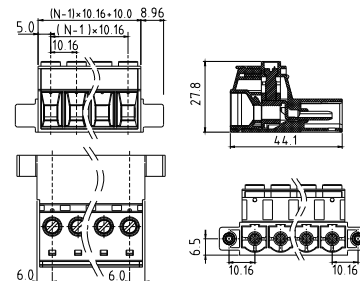


Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KK



Pitch 10.16mm
Flange with nut(With handle)
Poles 3p/4p
KKxx61540000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KX



Pitch 15.0mm
Poles 2p~10p
KXxxC150000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	31.5

Screw:	M5
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KX



Pitch 15.0mm
With flange
Poles 2p~10p
KXxxC1510000G*
Number of poles



Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	31.5

Screw:	M5
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

Screw:	M5
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	