

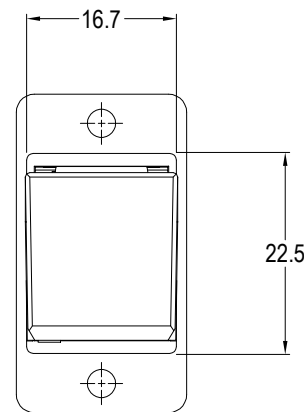


Material:


1. Keystone Body: ABS UL94 V2
2. USB (White): UL94 V-0
3. FT Frame: Polyamide UL94 V-2
4. Shell: Nickel plated Copper Alloy
5. Contacts: Gold Plated Copper Alloy

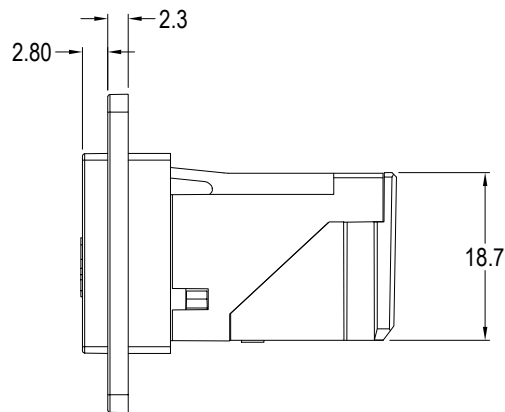



ISS.	AMEND	DATE
1	ISSUED	28/03/23

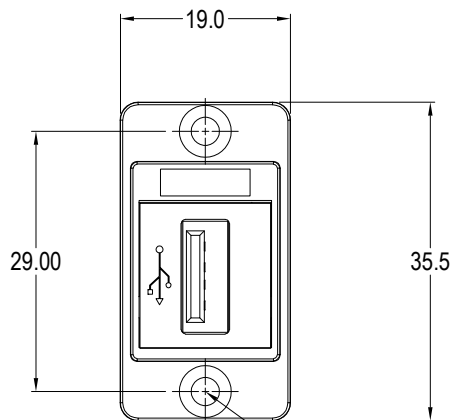

PLAIN HOLE VARIANTS
'X' VERSION Ø2.5
'X1' VERSION Ø3.2



3x HOLE VARIANTS
Ø3.2mm CSK 90° x Ø5.85
'X' PLAIN Ø2.5 HOLES
'X1' PLAIN Ø3.2 HOLES

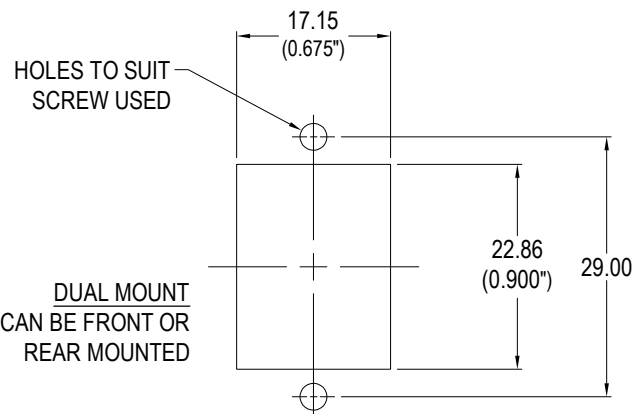

HOLES TO SUIT
SCREW USED

DUAL MOUNT
CAN BE FRONT OR
REAR MOUNTED

Performance:

1. Voltage rating: 30V AC
2. Current rating: 1.5A max
3. Contact resistance: 30mΩ max
4. Insulation resistance: 100MΩ min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C

VARIANTS

PART NO.	HOLE DETAILS
CP30754	HOLE Ø3.2 x CSK 90° x Ø5.85
CP30754X	PLAIN HOLE Ø2.5
CP30754X1	PLAIN HOLE Ø3.2

RoHS
✓ COMPLIANT

TOLERANCE
NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.

76 Holmesthorpe Avenue, Holmesthorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2023

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION:

DO NOT SCALE

MATERIAL: See Notes

FINISH: See Notes

DRAWN: T.J.O.

APPROVED: D.P.J.

TITLE: RAFT DUALSLIM USB2.0 A-A

DRWG. No. CP30754

FORM: A4DRWGH