

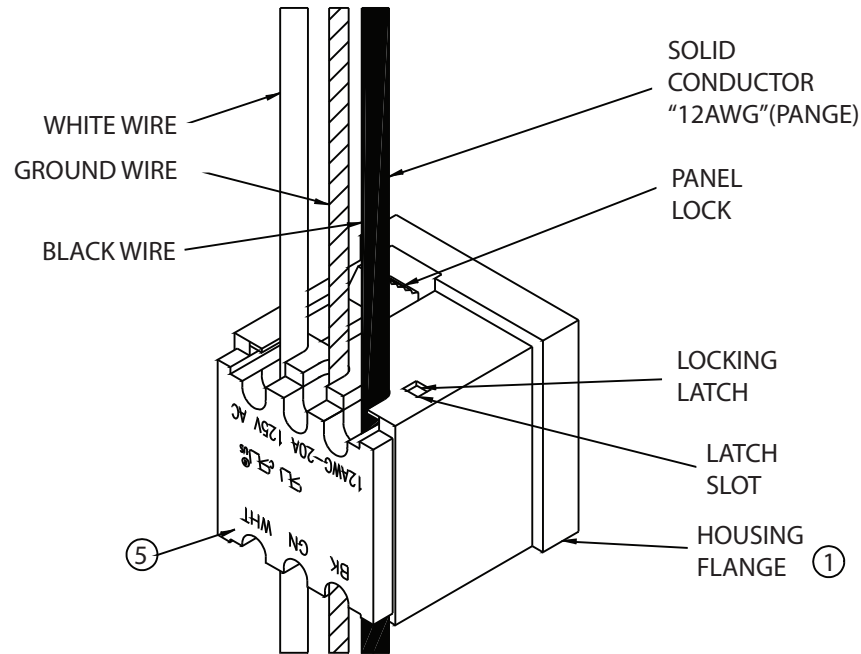


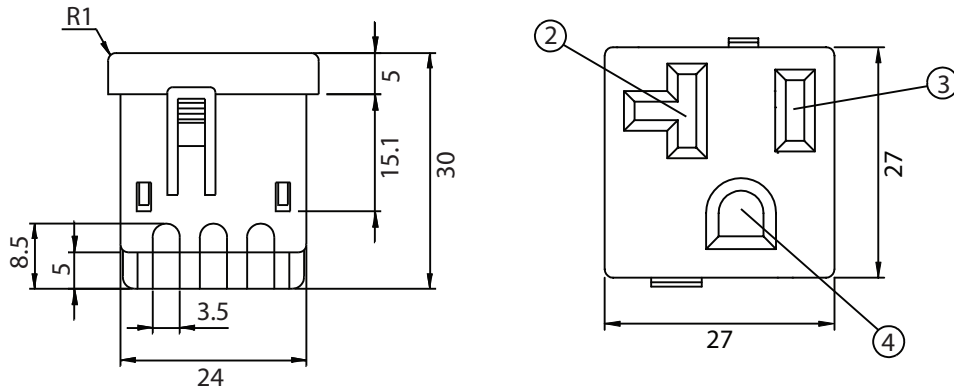

| REVISION |                 |          |          |
|----------|-----------------|----------|----------|
| REV.     | DESCRIPTION     | DATE     | APPROVED |
| B        | RoHS Compliancy | 06-01-06 | DP       |
| C        | UL Reapproval   | 05-27-07 | DP       |

THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

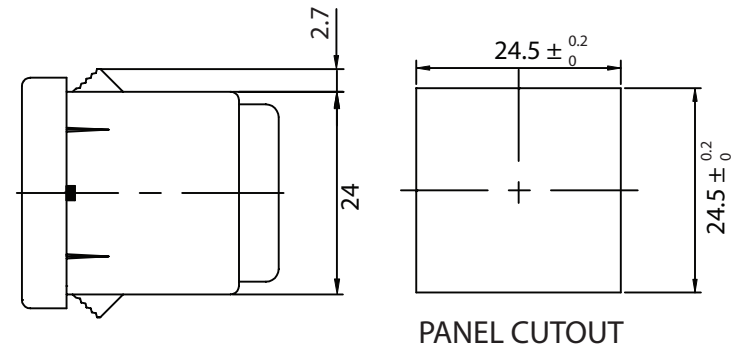

#### NOTES:

USE 12 AWG SOLID COPPER WIRE ONLY  
20A 125V  
PANEL THICKNESS: 0.8~1.8mm  
APPROVALS: UL,cUL  
PRODUCT SHIPPED UNASSEMBLED  
RoHS COMPLIANT

**CONTROLLED**

|   |                                            |   |
|---|--------------------------------------------|---|
| 5 | Cover back of the body, NYLON Black Color  | 1 |
| 4 | Contact PIN Bronze Strip t=0.7mm           | 1 |
| 3 | Contact PIN Bronze Strip t=0.7mm           | 1 |
| 2 | Contact PIN Bronze Strip t=0.7mm Ni-Plated | 1 |
| 1 | Body Insulator NYLON Black Color           | 1 |

| Dim range (mm) | Tolerance +/- (mm) | Qualtek Electronics Corp.<br>PPC DIVISION     |                |                 |
|----------------|--------------------|-----------------------------------------------|----------------|-----------------|
|                |                    | Part Number: 739W-X2/20                       | RoHS Compliant |                 |
| 0-1            | 0.15               | Description: SNAP-IN 20 AMP T-SLOT RECEPTACLE |                |                 |
| 1-6            | 0.20               |                                               |                |                 |
| 6-18           | 0.30               |                                               | UNIT: mm       | REV. C          |
| 18-50          | 0.50               |                                               |                |                 |
| 50-120         | 0.70               | Drawn / Date                                  | Checked / Date | Approved / Date |
| 120-250        | 0.90               | R.Nuti<br>05-27-07                            | 05-27-07       | JJH / 05-27-07  |
| 250-500        | 1.20               |                                               |                |                 |