


## Datasheet

### AC Outlet

### DIN-Rail Mountable Receptacles

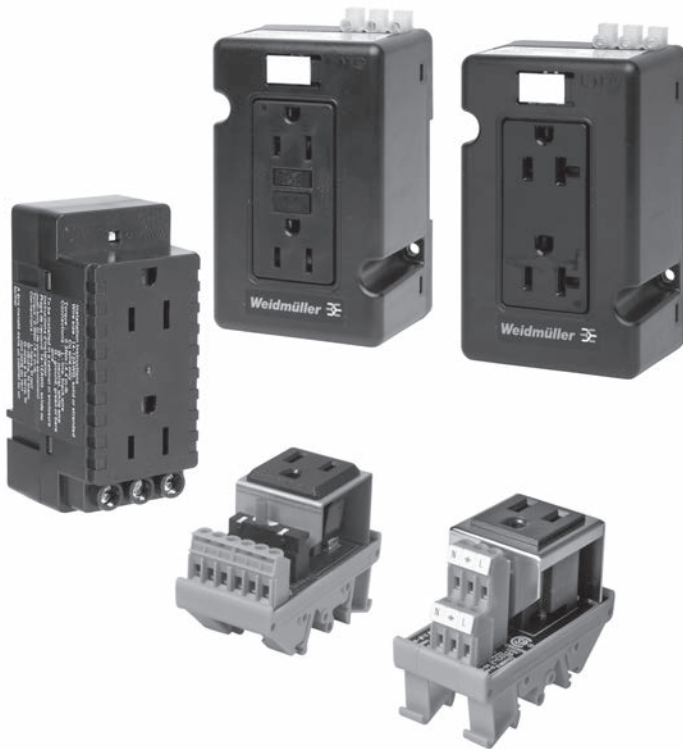

DIN-rail receptacles, 5A, 15A and 20A power outlets, provide a convenient power source for portable computers or test devices for in-the-panel troubleshooting. They mount on standard 35mm DIN-rail. The terminations accept slotted or Phillips screwdrivers. The mounting foot includes a latching lock - slide it open, mount the module on the DIN-rail and slide the lock closed.

- Easily snaps onto 35mm DIN-rail
- Panel mountable, model dependent
- 5A, 15A or 20A versions
- Easy to wire
- Available with ground fault current interrupt (GFCI) or standard outlets
- Optional power-on indication with GFCI\*
- NEMA rated enclosure with UL94 VO flammability rating
- UL508A, cULus, and cURus and CSA\* approved
- Latching mounting foot makes installation and removal from DIN-rail easy

\*Applies to part number 6720005430

#### Weidmüller, Canada

10 Spy Court  
Markham, Ontario L3R 5H6  
Telephone: (800) 268-4080  
Facsimile: (877) 300-5635  
Email: [info1@weidmuller.ca](mailto:info1@weidmuller.ca)  
Website: [www.weidmuller.ca](http://www.weidmuller.ca)

#### Weidmüller, Mexico

Bld. Hermanos Serdán 698,  
Col. San Rafael Oriente  
Puebla, Puebla, Mexico  
C.P. 72029  
Telephone: 01 222 2686267  
Facsimile: 01 222 2686219  
Email: [clientes@weidmuller.com.mx](mailto:clientes@weidmuller.com.mx)  
Website: [www.weidmuller.com.mx](http://www.weidmuller.com.mx)

#### Weidmüller, United States

821 Southlake Blvd.  
Richmond, Virginia 23236  
Telephone: (800) 849-9343  
Facsimile: (804) 379-2593  
Email: [info@weidmuller.com](mailto:info@weidmuller.com)  
Website: [www.weidmuller.com](http://www.weidmuller.com)

15 Amp

15 Amp Duplex

15 Amp GFCI



Technical data

|                     |
|---------------------|
| Voltage             |
| Current             |
| Operating Frequency |
| Dielectric Voltage  |

|                               |
|-------------------------------|
| 120 VAC nominal, 125 VAC max. |
| 15A max.                      |
| 50 - 60 Hz                    |
| Withstands 2000V per UL498    |

|                               |
|-------------------------------|
| 120 VAC nominal, 125 VAC max. |
| 15A max.                      |
| 50 - 60 Hz                    |
| Withstands 1500V per UL498    |

|                       |
|-----------------------|
| Trip Level            |
| Termination Wire Size |
| Terminal Torque       |
| Terminations          |

|                                              |
|----------------------------------------------|
| N/A                                          |
| 20 - 10 AWG (solid or stranded, copper only) |
| 0.79Nm/7 lb.-in.                             |
| Screw terminals, slotted                     |

|                                              |
|----------------------------------------------|
| 5mA ±1mA                                     |
| 20 - 10 AWG (solid or stranded, copper only) |
| 0.79Nm/7 lb.-in.                             |
| Screw terminals, slotted                     |

|                    |
|--------------------|
| <b>Temperature</b> |
| Operating          |
| Storage            |

|               |
|---------------|
| -25°C to 60°C |
| -35°C to 80°C |

|               |
|---------------|
| -25°C to 60°C |
| -35°C to 80°C |

|                               |
|-------------------------------|
| <b>Material Listing</b>       |
| Enclosure Cover, Flammability |
| Enclosure Base, Flammability  |
| Spring                        |

|                                                 |
|-------------------------------------------------|
| PBT/polycarbonate blend, UL94 rating V0 @ .63mm |
| Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm    |
| Stainless Steel                                 |

|                                                 |
|-------------------------------------------------|
| PBT/polycarbonate blend, UL94 rating V0 @ .63mm |
| Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm    |
| Stainless Steel                                 |

|                 |
|-----------------|
| <b>Mounting</b> |
| Width           |
| Length          |
| Height          |

|                                     |
|-------------------------------------|
| TS35 DIN-Rail or direct panel mount |
| 74.1mm/2.9 in.                      |
| 123.6mm/4.9 in.                     |
| 61.5mm/2.4 in.                      |

|                                     |
|-------------------------------------|
| TS35 DIN-Rail or direct panel mount |
| 74.1mm/2.9 in.                      |
| 123.6mm/4.9 in.                     |
| 61.5mm/2.4 in.                      |

Approvals/Certifications

|                |
|----------------|
| Enclosure Type |
|----------------|

Description

|                                                            |
|------------------------------------------------------------|
| UL cULus Listed to UL508A and C22.2 No. 14<br>File E223801 |
| NEMA WD6, 5-15R                                            |

Description


|                                                            |
|------------------------------------------------------------|
| UL cULus Listed to UL508A and C22.2 No. 14<br>File E223801 |
| NEMA WD6, 5-15R                                            |

Ordering data

|  |
|--|
|  |
|  |
|  |

| Type       | Part No.   |
|------------|------------|
| DRAC DP 15 | 6720005421 |

| Type       | Part No.   |
|------------|------------|
| DRAC GF 15 | 6720005422 |

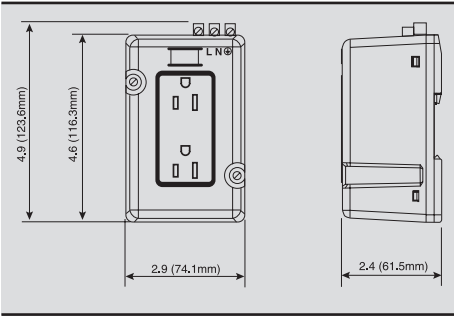

20 Amp

20 Amp Duplex

20 Amp GFCI



Technical data

|                     |
|---------------------|
| Voltage             |
| Current             |
| Operating Frequency |
| Dielectric Voltage  |

|                               |
|-------------------------------|
| 120 VAC nominal, 125 VAC max. |
| 20A max.                      |
| 50 - 60 Hz                    |
| Withstands 2000V per UL498    |

|                               |
|-------------------------------|
| 120 VAC nominal, 125 VAC max. |
| 20A max.                      |
| 50 - 60 Hz                    |
| Withstands 1500V per UL498    |

|                       |
|-----------------------|
| Trip Level            |
| Termination Wire Size |
| Terminal Torque       |
| Terminations          |

|                                              |
|----------------------------------------------|
| N/A                                          |
| 20 - 10 AWG (solid or stranded, copper only) |
| 0.79Nm/7 lb.-in.                             |
| Screw terminals, slotted                     |

|                                              |
|----------------------------------------------|
| 5mA ±1mA                                     |
| 20 - 10 AWG (solid or stranded, copper only) |
| 0.79Nm/7 lb.-in.                             |
| Screw terminals, slotted                     |

|                    |
|--------------------|
| <b>Temperature</b> |
| Operating          |
| Storage            |

|               |
|---------------|
| -25°C to 60°C |
| -35°C to 80°C |

|               |
|---------------|
| -25°C to 60°C |
| -35°C to 80°C |

|                               |
|-------------------------------|
| <b>Material Listing</b>       |
| Enclosure Cover, Flammibility |
| Enclosure Base, Flammibility  |
| Spring                        |

|                                                 |
|-------------------------------------------------|
| PBT/polycarbonate blend, UL94 rating V0 @ .63mm |
| Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm    |
| Stainless Steel                                 |

|                                                 |
|-------------------------------------------------|
| PBT/polycarbonate blend, UL94 rating V0 @ .63mm |
| Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm    |
| Stainless Steel                                 |

|                 |
|-----------------|
| <b>Mounting</b> |
| Width           |
| Length          |
| Height          |

|                                     |
|-------------------------------------|
| TS35 DIN-Rail or direct panel mount |
| 74.1mm/2.9 in.                      |
| 123.6mm/4.9 in.                     |
| 61.5mm/2.4 in.                      |

|                                     |
|-------------------------------------|
| TS35 DIN-Rail or direct panel mount |
| 74.1mm/2.9 in.                      |
| 123.6mm/4.9 in.                     |
| 61.5mm/2.4 in.                      |

|                                 |
|---------------------------------|
| <b>Approvals/Certifications</b> |
|---------------------------------|

|                                            |
|--------------------------------------------|
| <b>Description</b>                         |
| UL cULus Listed to UL508A and C22.2 No. 14 |
| File E223801                               |
| NEMA WD6, 5-20R                            |

|                                            |
|--------------------------------------------|
| <b>Description</b>                         |
| UL cULus Listed to UL508A and C22.2 No. 14 |
| File E223801                               |
| NEMA WD6, 5-20R                            |


|                |
|----------------|
| Enclosure Type |
|----------------|

Ordering data

|  |
|--|
|  |
|  |

|             |                 |
|-------------|-----------------|
| <b>Type</b> | <b>Part No.</b> |
| DRAC DP 20  | 6720005420      |

|             |                 |
|-------------|-----------------|
| <b>Type</b> | <b>Part No.</b> |
| DRAC GF 20  | 6720005423      |

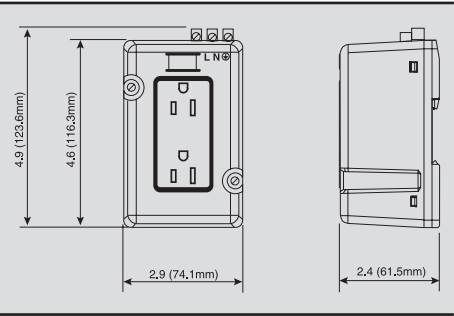

Compact 15 Amp

This new DIN-rail mountable duplex receptacle makes adding a 120V maintenance AC outlet to control cabinets quick and easy. It mounts on standard 35mm DIN-rail and requires just 42mm of rail space. An LED indicates that 120V is applied to the module. The terminations accept slotted or Phillips screwdrivers. The mounting foot includes a latching lock – slide it open, mount the module on the DIN-rail and slide the lock closed.

- requires just 42mm of DIN-rail
- includes power status LED
- latching mounting foot makes installation and removal from DIN-rail easy
- CSA certified and cURus recognized


15 Amp Duplex w/LED



Technical data

|                                 |
|---------------------------------|
| Voltage                         |
| Current                         |
| Wire Size (AWG)                 |
| Stripping Length mm/in.         |
| Terminations                    |
| Terminal Torque                 |
| <b>Mounting</b>                 |
| Width                           |
| Length                          |
| Height                          |
| <b>Approvals/Certifications</b> |
|                                 |
|                                 |
|                                 |
|                                 |
| <b>Ordering data</b>            |
|                                 |
|                                 |
|                                 |


|                                                                        |
|------------------------------------------------------------------------|
| 120 VAC nominal                                                        |
| 15A max.                                                               |
| 14-12 AWG (Solid or stranded, copper only)                             |
| 8.8-11 / 0.347-0.433                                                   |
| Screw terminals, slotted or Phillips                                   |
| "L":line "W":neutral "G":ground                                        |
| 0.5Nm/4.4 in-lb                                                        |
| TS35 DIN-Rail                                                          |
| 42mm/1.65 in.                                                          |
| 99mm/3.90 in.                                                          |
| 51mm/2.01 in.                                                          |
| <b>Description</b>                                                     |
| CSA certified, file 251163, Project 2345434, according to C22.2 No. 42 |
| cURus recognized, file E340886, according to UL498 and C22.2 No. 182.3 |
| <b>Type</b>                                                            |
| DUPLX 120VAC OUTLET W/LED                                              |
| <b>Part No.</b>                                                        |
| 6720005430                                                             |

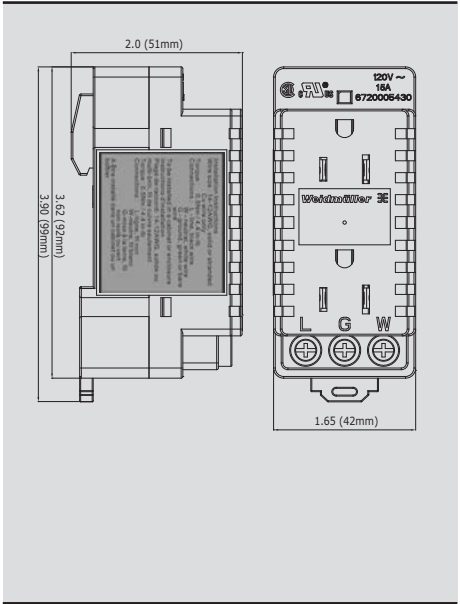

Simplex

5 Amp Simplex w/ Circuit Breaker

15 Amp Simplex w/o Circuit Breaker



Technical data

|                         |
|-------------------------|
| Voltage                 |
| Current                 |
| Wire Size (AWG)         |
| Stripping Length mm/in. |
| Terminal Torque         |
| <b>Mounting</b>         |
| Width                   |
| Length                  |
| Height                  |

|                                          |
|------------------------------------------|
| 120 VAC                                  |
| 5A max.                                  |
| 26 - 12 AWG (0.14 - 4.0mm <sup>2</sup> ) |
| 6mm                                      |
| 0.5-0.6 Nm                               |
| TS32 or TS35 DIN-Rail                    |
| 35mm/1.38 in.                            |
| 70mm/2.76 in.                            |
| 58.5mm/2.30 in.                          |

|                                          |
|------------------------------------------|
| 120 VAC                                  |
| 15A max.                                 |
| 26 - 12 AWG (0.14 - 4.0mm <sup>2</sup> ) |
| 6mm                                      |
| 0.5-0.6 Nm                               |
| TS32 or TS35 DIN-Rail                    |
| 35mm/1.38 in.                            |
| 70mm/2.76 in.                            |
| 58.5mm/2.30 in.                          |

Approvals/Certifications

Description

UL LR-229352, E252394

Description

UL LR-229352, E252394

Ordering data

| Type                                                       | Part No.   |
|------------------------------------------------------------|------------|
| Single outlet with circuit breaker                         | 9915480001 |
| (supplemental protector with manual reset via push button) |            |

| Type                                  | Part No.   |
|---------------------------------------|------------|
| Single outlet without circuit breaker | 9915480000 |

