
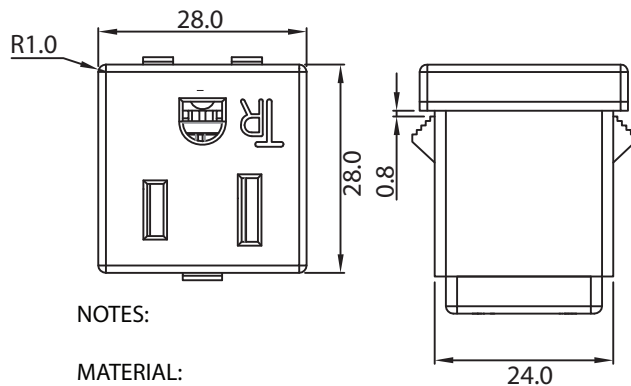






REVISION			
REV.	DESCRIPTION	DATE	APPROVED

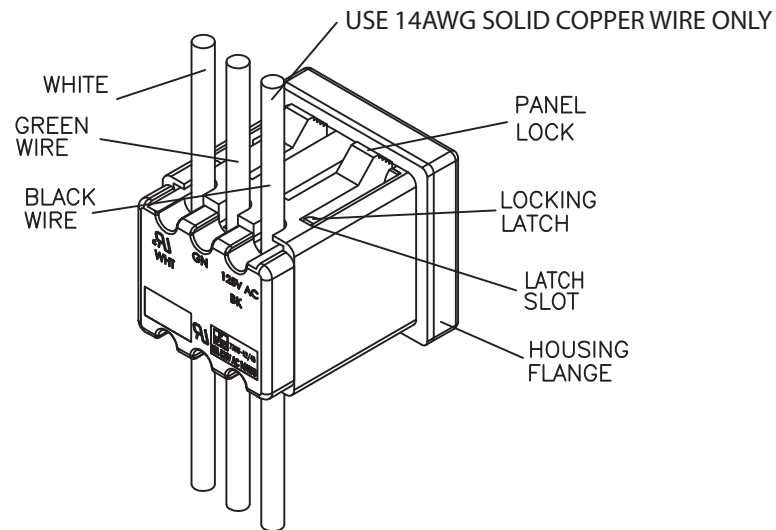

NOTES:

MATERIAL:

TOP COVER: PC BLACK COLOR
BODY: NYLON 66 BLACK COLOR
SPRING: SWC
SHUTTER: POM WHITE COLOR
BACK COVER: PC BLACK COLOR
GN TERMINAL: BRASS t=0.4mm
BK TERMINAL: BRASS t=0.4mm
WHT TERMINAL: BRASS t=0.4mm NI-PLATED
USE 14AWG SOLID COPPER WIRE ONLY
PRODUCT SHIPPED UNASSEMBLED
RATING: 15A 125V AC
APPROVALS: UL, cUL
PANEL THICKNESS: 0.8~2.0mm
TAMPER RESISTANT
RoHS COMPLIANT

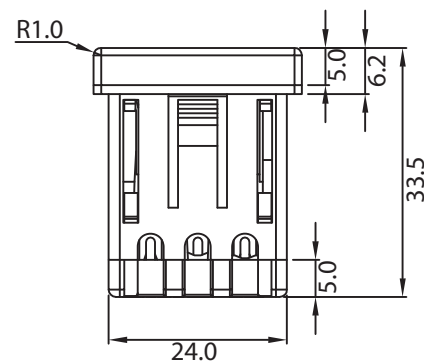

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	739W-X2/45	RoHS Compliant
0-1	0.20	Description: TAMPER RESISTANT AC RECEPTACLE		
1-6	0.25			
6-18	0.40		UNIT: mm	
18-50	0.50			
50-120	0.70			
120-250	0.90	Drawn / Date	Checked / Date	Approved / Date
250-500	1.20	R. Nuti 01-06-15	01-06-15	LY / 01-06-15