


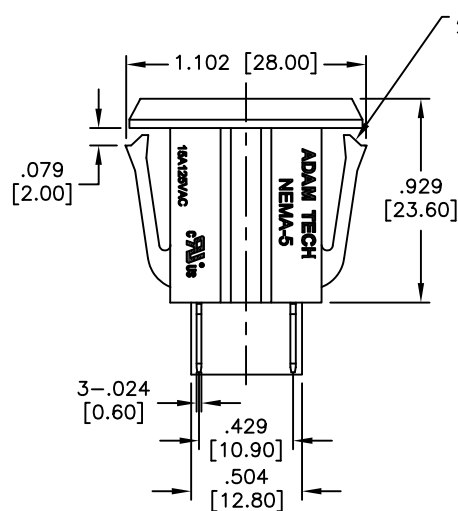


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/31/13	
A		ADDED & REVISED DIM.	8/19/13	
B		UPDATED DRAWING	8/30/16	HR/CH
C		UPDATED DIM.	8/17/18	AY/KC
D		UPDATED DESCRIPTION	8/24/18	AY/KC

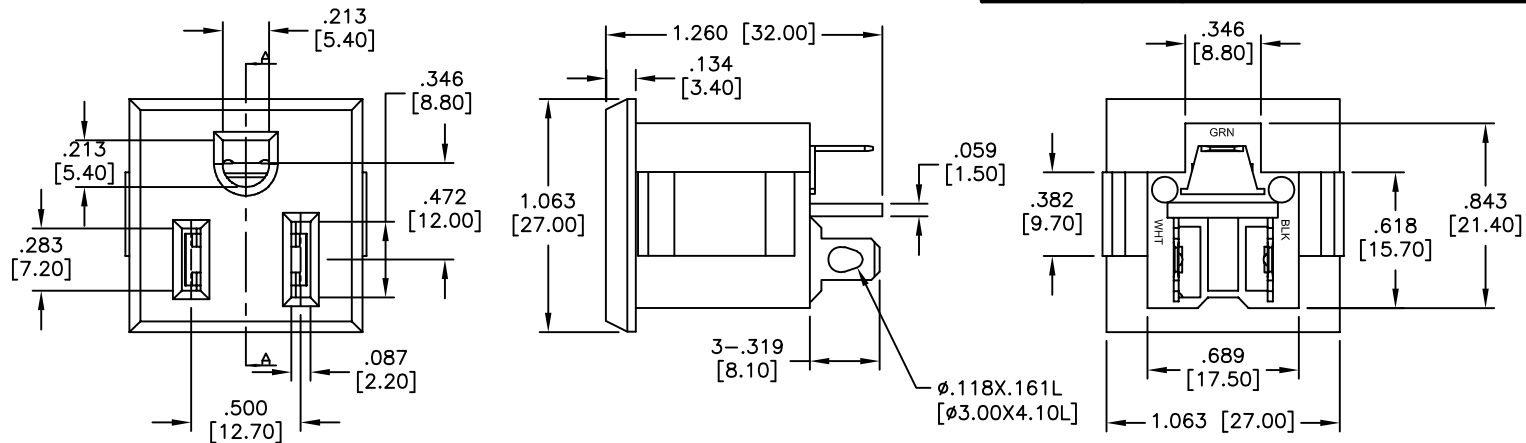

SECTION A-A

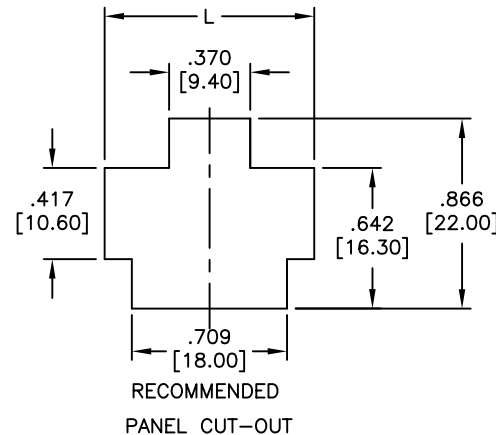

PANEL THICKNESS	DIM " L "
.031 [0.80]	.945 [24.00]
.039 [1.00]	.969 [24.60]
.047 [1.20]	.992 [25.20]
.063 [1.60]	1.031 [26.20]

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Tin over Copper underplate overall

Electrical:

Rating: 15A, 125V (C-ULus)

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 3,000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY 7/31/13 CHECKED LW 7/31/13 APPROVED			DATE 7/31/13			TITLE NEMA RECEPTACLE
SIZE X		PART NO. NEMA-5-1-B		REV. D		
REF: S00087C		SCALE: NTS		SHEET 1 OF 1		