





Nominal voltage	1.5 V
Impedance	80 m-ohm @ 1 kHz
Typical weight	24 g (0.8 oz)
Typical volume	8.4 cm ³ (0.5 in ³)
Terminals	Flat
Storage temperature range	6°C to 29°C (42°F to 85°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 15AP

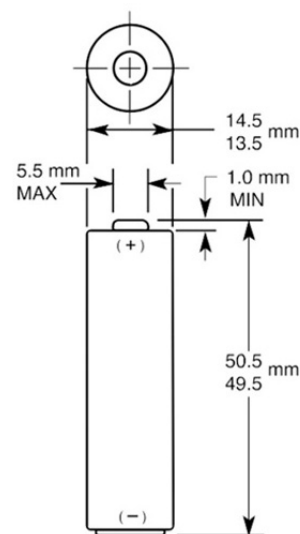


Dimensions shown are ANSI standards

Coppertop AA Constant Current

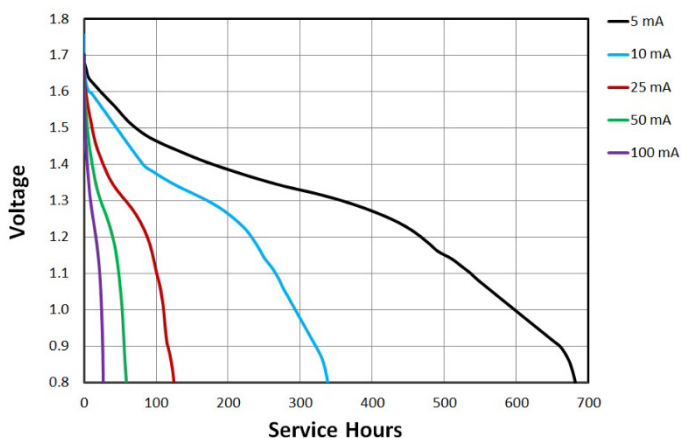

Coppertop AA Constant Current

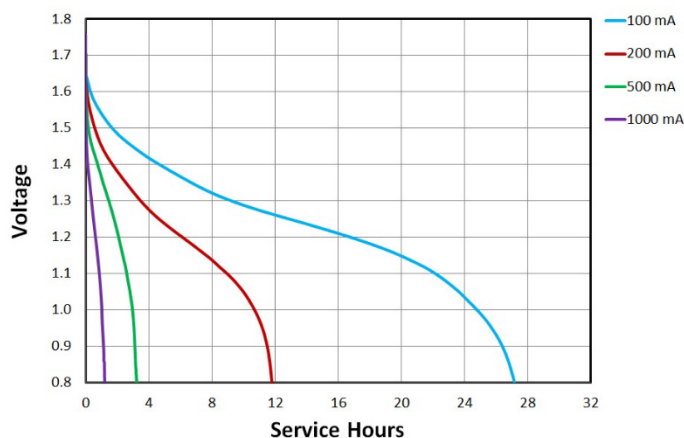


DURACELL®


A Berkshire Hathaway Company
Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


Coppertop AA Constant Power

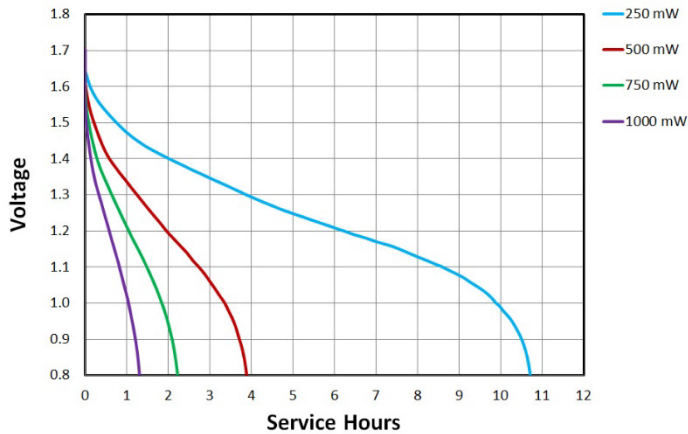


Coppertop AA Constant Resistance

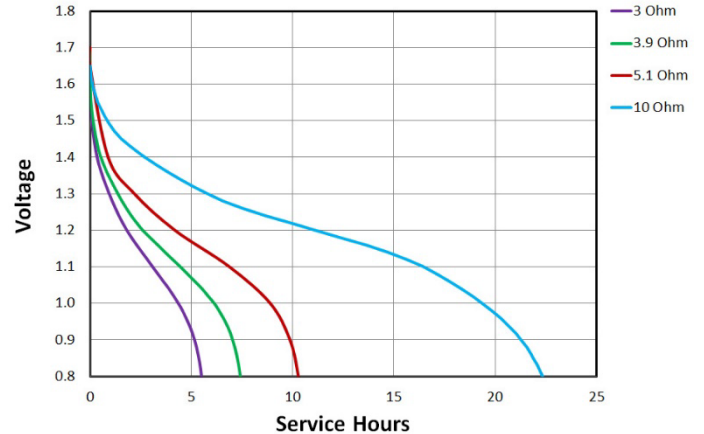

Coppertop AA Constant Temperature at 300 mA

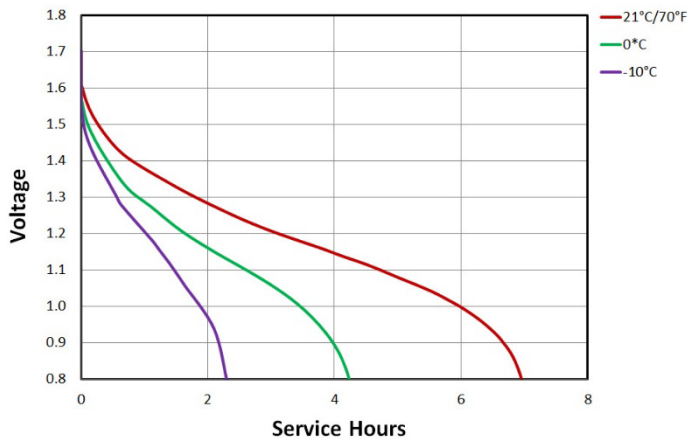

Typical Duracell AA Coppertop Cell Impedance

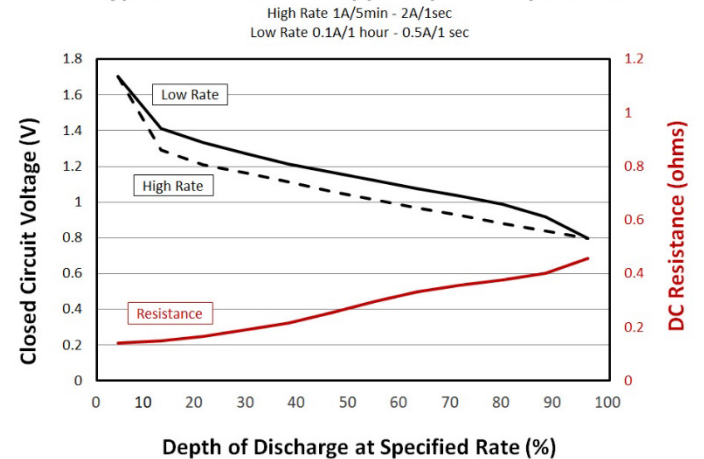

DURACELL[®]

A Berkshire Hathaway Company
Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

LR45404