





Nominal voltage	1.5 V
Impedance	128 m-ohm @ 1 kHz
Typical weight	13 g (0.4 oz)
Typical volume	3.5 cm ³ (0.5 in ³)
Terminals	Flat
Storage temperature range	6°C to 29°C (42°F to 85°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 24AP

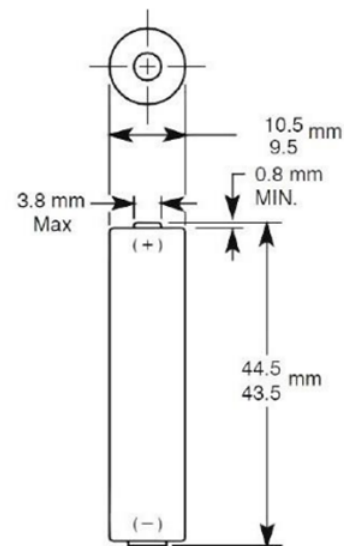


Dimensions shown are ANSI standards

Coppertop AAA Constant Current

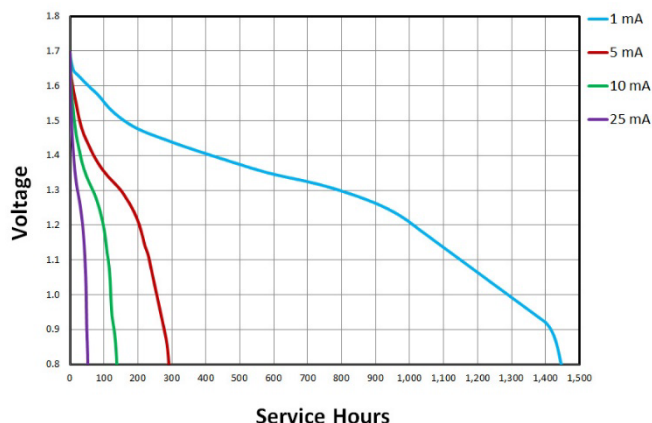

Coppertop AAA Constant Current

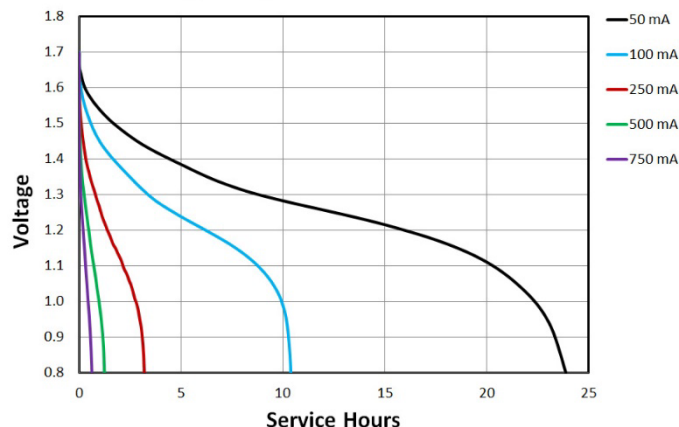


DURACELL®


A Berkshire Hathaway Company
Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


Coppertop AAA Constant Power

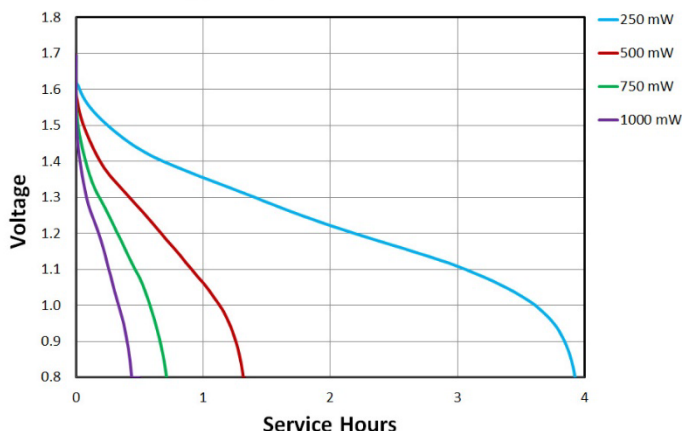


Coppertop AAA Constant Resistance

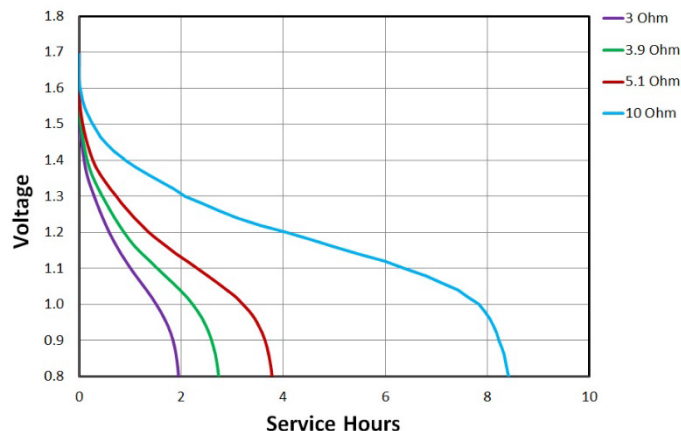

Coppertop AAA Constant Temperature at 100 mA

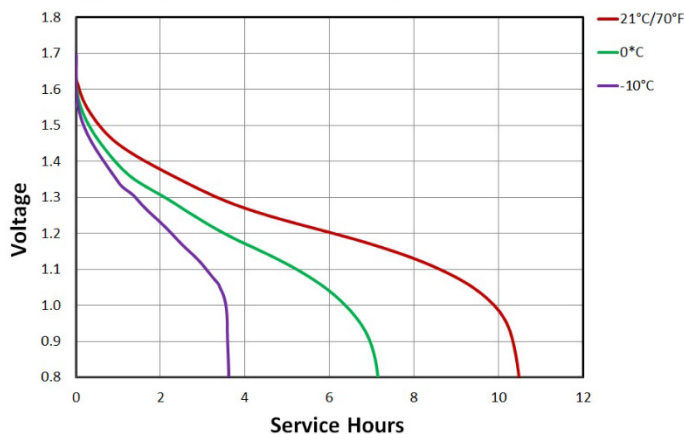

Typical Duracell AAA Coppertop Cell Impedance

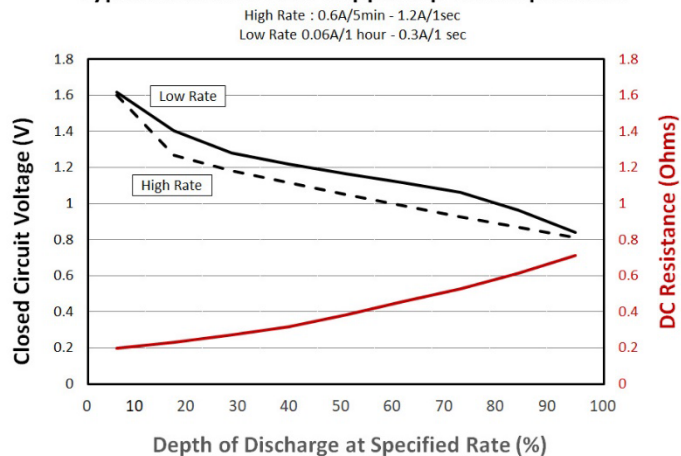

DURACELL[®]

A Berkshire Hathaway Company
Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

LR45213