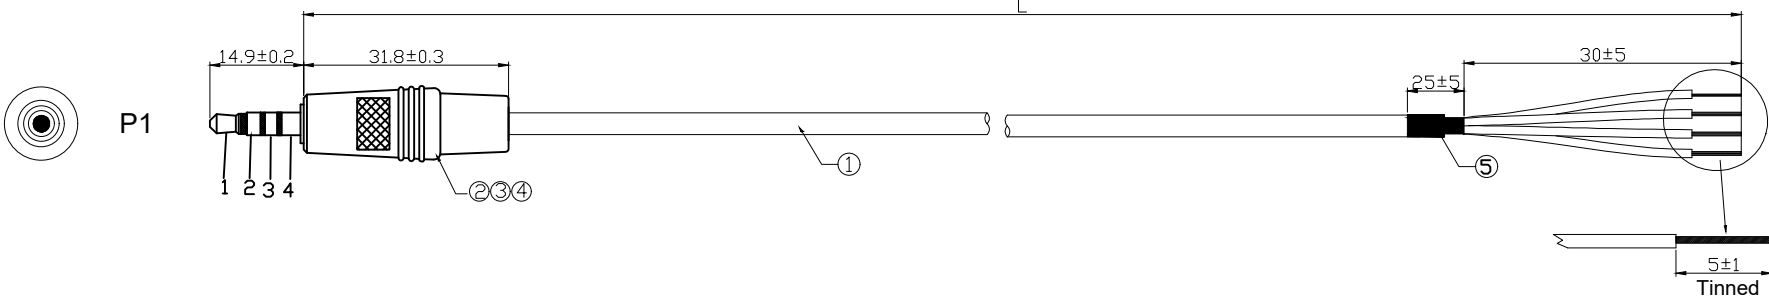
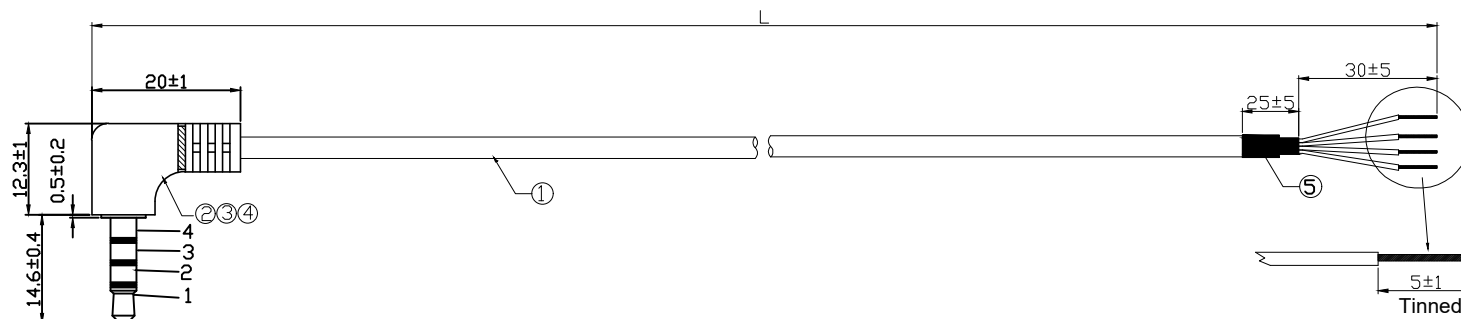


	1	2	3	4	5	6	7																																
A									A																														
B									B																														
C									C																														
D	<table><thead><tr><th>ITEM NO</th><th>L</th><th>Color</th></tr></thead><tbody><tr><td>A-AV-02-45-28-183-S</td><td>1830±30mm</td><td>Black</td></tr><tr><td>A-AV-02-45-28-091-S</td><td>915±20mm</td><td>Black</td></tr><tr><td>A-AV-02-45-28-183-S1</td><td>1830±30mm</td><td>White</td></tr><tr><td>A-AV-02-45-28-091-S1</td><td>915±20mm</td><td>White</td></tr></tbody></table>								ITEM NO	L	Color	A-AV-02-45-28-183-S	1830±30mm	Black	A-AV-02-45-28-091-S	915±20mm	Black	A-AV-02-45-28-183-S1	1830±30mm	White	A-AV-02-45-28-091-S1	915±20mm	White	D															
ITEM NO	L	Color																																					
A-AV-02-45-28-183-S	1830±30mm	Black																																					
A-AV-02-45-28-091-S	915±20mm	Black																																					
A-AV-02-45-28-183-S1	1830±30mm	White																																					
A-AV-02-45-28-091-S1	915±20mm	White																																					
E									E																														
F	NOTE: 1.100% OPEN SHORT & MISWIRE TEST. 2.HIPOT TEST:AT DC300V 3.INSULATION RESISTANCE:10M OHM/MIN. 4.CONDUCTIVE RESISTANCE: 5 OHM/MAX.		PIN ASSIGNMENT P1 — RED 1 — WHITE 2 — GREEN 3 — BLACK			<table><tbody><tr><td>⑤</td><td>HT-TUBE</td><td>OD4.0mm,L=25mm</td><td>1</td><td>PCS</td></tr><tr><td>④</td><td>INNER MOLD</td><td>LDPE</td><td>N/A</td><td>G</td></tr><tr><td>③</td><td>OUTER MOLD</td><td>PVC , 45P</td><td>N/A</td><td>G</td></tr><tr><td>②</td><td>CONN</td><td>3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED</td><td>1</td><td>PCS</td></tr><tr><td>①</td><td>CABLE</td><td>NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8</td><td>1</td><td>PCS</td></tr><tr><td>NO.</td><td>NAME</td><td>DESCRIPTION</td><td>Q'TY</td><td>UNIT</td></tr></tbody></table>			⑤	HT-TUBE	OD4.0mm,L=25mm	1	PCS	④	INNER MOLD	LDPE	N/A	G	③	OUTER MOLD	PVC , 45P	N/A	G	②	CONN	3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED	1	PCS	①	CABLE	NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8	1	PCS	NO.	NAME	DESCRIPTION	Q'TY	UNIT	F
⑤	HT-TUBE	OD4.0mm,L=25mm	1	PCS																																			
④	INNER MOLD	LDPE	N/A	G																																			
③	OUTER MOLD	PVC , 45P	N/A	G																																			
②	CONN	3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED	1	PCS																																			
①	CABLE	NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8	1	PCS																																			
NO.	NAME	DESCRIPTION	Q'TY	UNIT																																			
G	RoHS compliant Unit: mm		Scale	Free				Date	Name	Customer-No.																													
TOLERANCE							Drawn	05.11.2021	Daniel	ASSMANN WSW-No. A-AV-02-45-28-xxx-x																													
								Approved	05.11.2021			Daniel																											
H			DIM	TOL								Drawing-No.																											
												ASS 10058 CA		rev00																									
							Replace					Sheet																											
	Angle	TOL	Id.	Modification	Date	Name	1 / 2																																

	1	2	3	4	5	6	7																									
A	<table><thead><tr><th>ITEM NO</th><th>L</th><th>Color</th></tr></thead><tbody><tr><td>A-AV-02-45-28-183-S2</td><td>1830±30mm</td><td>Black</td></tr><tr><td>A-AV-02-45-28-091-S2</td><td>915±20mm</td><td>Black</td></tr><tr><td>A-AV-02-45-28-183-S3</td><td>1830±30mm</td><td>White</td></tr><tr><td>A-AV-02-45-28-091-S3</td><td>915±20mm</td><td>White</td></tr></tbody></table>								ITEM NO	L	Color	A-AV-02-45-28-183-S2	1830±30mm	Black	A-AV-02-45-28-091-S2	915±20mm	Black	A-AV-02-45-28-183-S3	1830±30mm	White	A-AV-02-45-28-091-S3	915±20mm	White	A								
ITEM NO									L	Color																						
A-AV-02-45-28-183-S2									1830±30mm	Black																						
A-AV-02-45-28-091-S2									915±20mm	Black																						
A-AV-02-45-28-183-S3									1830±30mm	White																						
A-AV-02-45-28-091-S3	915±20mm	White																														
B	B																															
C	C																															
D	D																															
E	E																															
F	NOTE: 1.100% OPEN SHORT & MISWIRE TEST. 2.HIPOT TEST:AT DC300V 3.INSULATION RESISTANCE:10M OHM/MIN. 4.CONDUCTIVE RESISTANCE: 5 OHM/MAX. PIN ASSIGNMENT P1 RED 1 WHITE 2 GREEN 3 BLACK 4 <table><tbody><tr><td>⑤</td><td>HT-TUBE</td><td>OD4.0mm,L=25mm</td><td>1</td><td>PCS</td></tr><tr><td>④</td><td>INNER MOLD</td><td>LDPE</td><td>N/A</td><td>G</td></tr><tr><td>③</td><td>OUTER MOLD</td><td>PVC , 45P</td><td>N/A</td><td>G</td></tr><tr><td>②</td><td>CONN</td><td>3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED</td><td>1</td><td>PCS</td></tr><tr><td>①</td><td>CABLE</td><td>NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8</td><td>1</td><td>PCS</td></tr><tr><td>NO.</td><td>NAME</td><td>DESCRIPTION</td><td>Q'TY</td><td>UNIT</td></tr></tbody></table>	⑤	HT-TUBE	OD4.0mm,L=25mm	1	PCS	④	INNER MOLD	LDPE	N/A	G	③	OUTER MOLD	PVC , 45P	N/A	G	②	CONN	3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED	1	PCS	①	CABLE	NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8	1	PCS	NO.	NAME	DESCRIPTION	Q'TY	UNIT	F
⑤	HT-TUBE	OD4.0mm,L=25mm	1	PCS																												
④	INNER MOLD	LDPE	N/A	G																												
③	OUTER MOLD	PVC , 45P	N/A	G																												
②	CONN	3.5ST MALE TRAY6.0MM,L=30MM, NICKEL PLATED	1	PCS																												
①	CABLE	NOUL 28AWG(7/0.12BC)*4C+A,80°C,OD3.8	1	PCS																												
NO.	NAME	DESCRIPTION	Q'TY	UNIT																												
G	RoHS compliant Unit: mm	Scale	Free					Date	Name	Customer-No.																						
		TOLERANCE						Drawn	05.11.2021	Daniel	ASSMANN WSW-No. A-AV-02-45-28-xxx-x																					
								Approved	05.11.2021	Daniel																						
											Drawing-No.																					
H		DIM	TOL					ASSMANN WSW components		ASS 10058 CA		rev00																				
				⑩	Drawn	05.11.2021	Daniel			Replace		Sheet																				
	Angle	TOL	Id.	Modification		Date	Name					2 / 2																				
	1	2	3	4	5	6	7	CAB1042																								