

A

B

C


D

E

F

## G

H

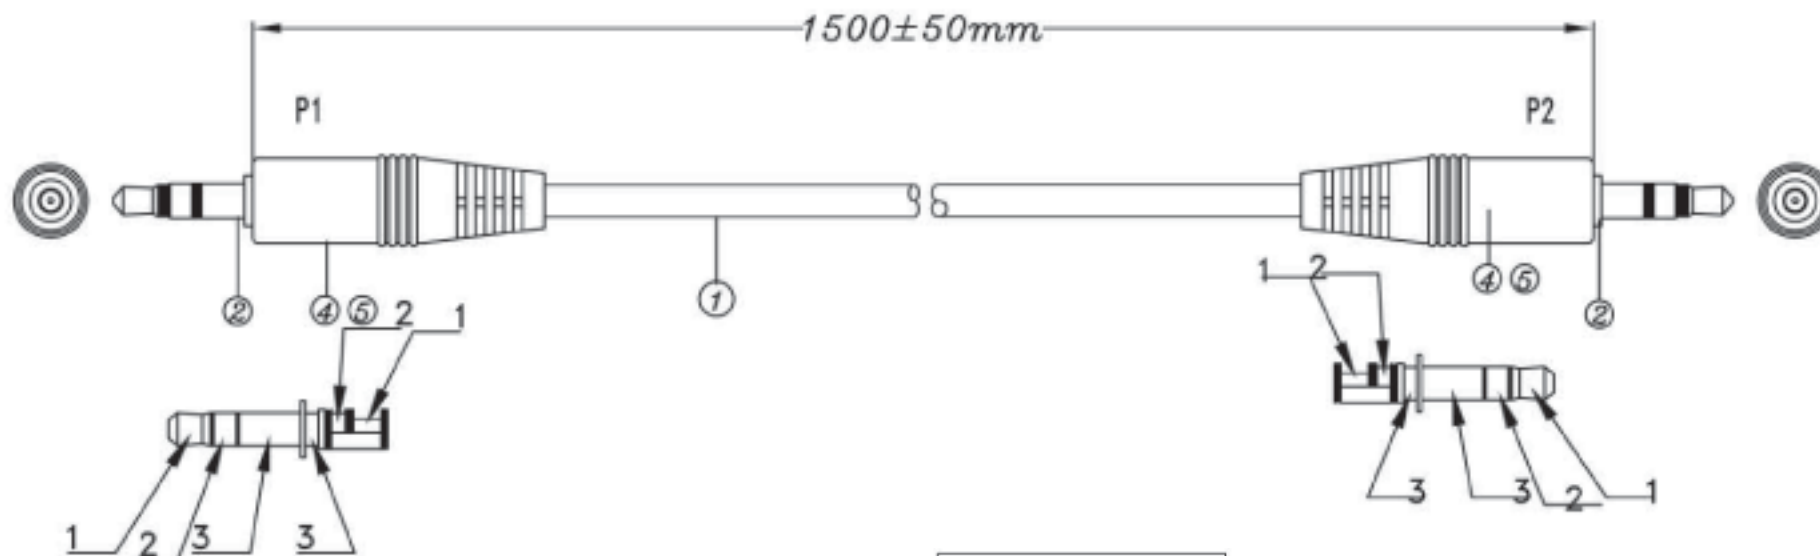


*Electrical test:*

1. 100% short, open, miswire test
2. Conduct resistance: 2 Ohm(max)
3. Insulation resistance: 1 Mohm(min)
4. dielectric test: DC 300V

## PIN ASSIGNMENT

| P1 |       | P2 |
|----|-------|----|
| 1  | RED   | 1  |
| 2  | WHITE | 2  |
| 3  | S     | 3  |

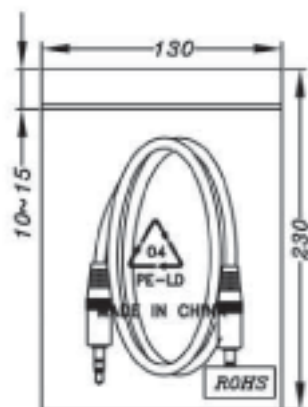

|     |          |                                                                |        |      |          |
|-----|----------|----------------------------------------------------------------|--------|------|----------|
| 5   |          | OUTER MODEL PVC 45P COLOR BLACK                                |        | 4.8  | g        |
| 4   |          | ROUND TIN OD1.0mm                                              |        | 0.15 | g        |
| 3   |          | 3.5 STEREO JACK OD8.0mm                                        |        | 1    | P2       |
| 2   |          | 3.5 STEREO PLUG PLATE NICKEL L=30mm                            |        | 1    | P1       |
| 1   |          | T.C (7/0.12*2C+43/0.12)*1C (RED,WHITE)*3.0 COLOR BLACK(CS-001) | 01     | 1    | 1500mm   |
| NO. | PART NO. | DESCRIPTION                                                    | VENDER | QTY  | UNIT/REF |

[illegible]

| Item No. | Item Description | Unit | Quantity | Rate | Amount |
|----------|------------------|------|----------|------|--------|
|----------|------------------|------|----------|------|--------|

# AK-AV100-R (1.50M)

|              |                                                                           |
|--------------|---------------------------------------------------------------------------|
| <b>Title</b> | Stereo Connection Cable, 3-Pin,<br>3.5mm Stereo Male to 3.5mm Stereo Male |
|--------------|---------------------------------------------------------------------------|

Drawing No.

rev00

|         |
|---------|
| Replace |
|---------|

|  |       |
|--|-------|
|  | Sheet |
|--|-------|

