


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00405	Connector, mono plug, 3.5xL23.5 mm, brass, nickel plated, white, molding style	1	
2	30-00178	Wire, 2C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00028	Overmold, PVC	1	white

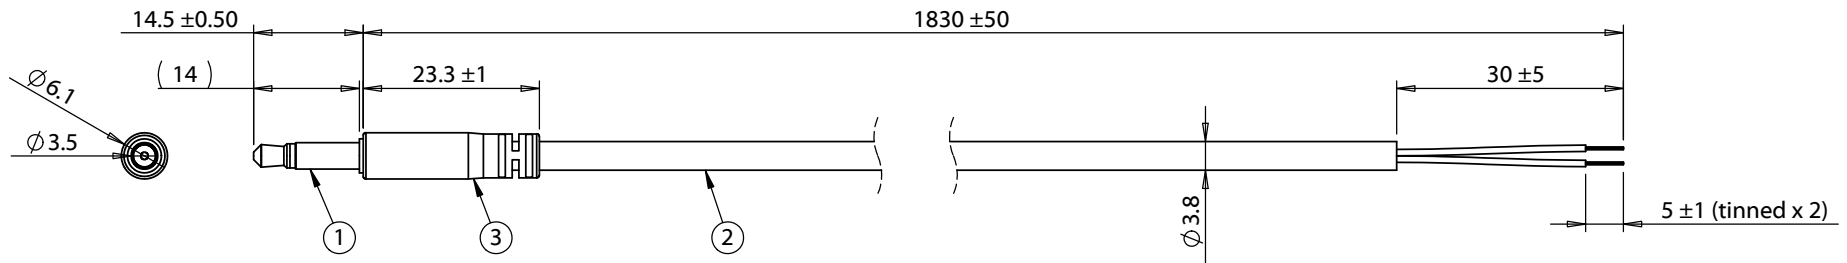


Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Wiring Diagram	
50-00405	wire color
tip	red
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	4/14/2010	Initial release	GL Digitally signed by GL Date: 2016.10.28 10:13:15 -07'00'	RoHS compliant		
A1	9/6/2011	Updated specification	Verified: DN Digitally signed by DN Date: 2016.10.28 15:12:31 -07'00'	Function test: no open, no short circuit, no intermittent	Size: A Part number: 10-00335	
A2	3/28/2012	Updated wire part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5 mm 50-00405 slim mono plug to 5 mm tinned, 28 AWG, 30-00178, shielded, white		
A3	10/8/2014	Updated connector			Scale: 1:5  Sheet 1 of 1	
A4	10/21/2016	Corrected overmold dimensions				