

Adapter Coaxial Connector BNC Jack, Female Socket to SMA Plug, Male Pin 50 Ohms

**RoHS
Compliant**

Stock No.: 9200636A0124

FEATURES

- BNC Female to SMA Male
- 50Ω




Product Description

This BNC Female to SMA Male coaxial adapter provides the ability to connect between BNC Male and SMA Female interface. Interconnection of these interfaces is often found in test lab or in field environments where devices of differing interface types are interconnected.

General Specifications

Attribute	Value
Adapter Type A	BNC
Adapter Type B	SMA
Gender A	Female
Gender B	Male
Impedance	50Ω
Frequency Range	11 GHz
Body Orientation	Straight
Polarity	Normal
Contact Plating	Gold
Body Plating	Nickel
Contact Material	Phosphor Bronze
Voltage Rating	500 V rms
Temperature Range	-65°C ~ 85°C

Product Drawing

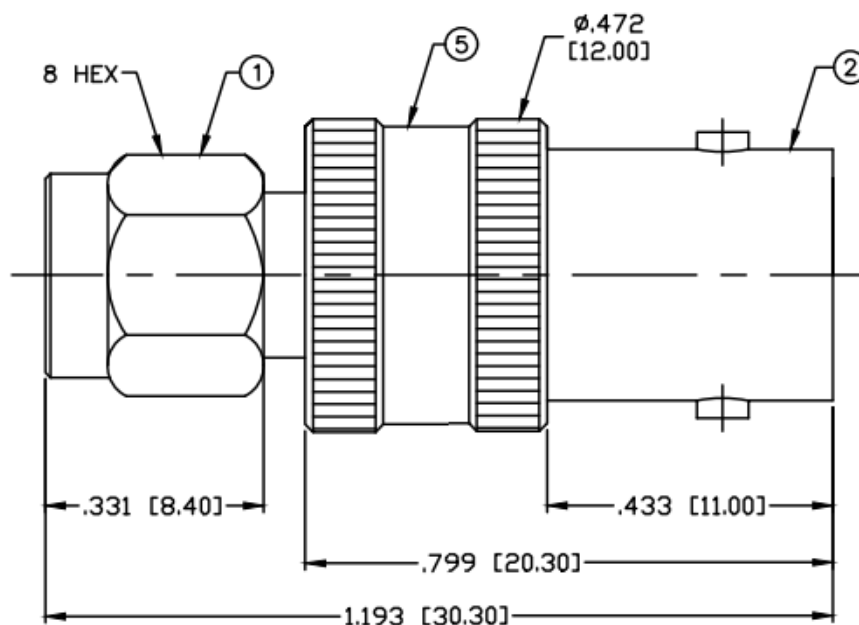

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0–6 GHz

WORKING VOLTAGE: 500 V rms Max. @ Sea Level

INSULATION RESISTANCE: 5k M Ohms min.

TEMPERATURE RANGE: –65°C TO 85°C

Dimensions: Millimeters (Inches)

Part Number Table

Part Number	Description
9200636A0124	Adapter Coaxial Connector BNC Jack, Female Socket to SMA Plug, Male Pin 50 Ohms

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.