


## Straight 75Ω RF Adapter BNC Socket to BNC Socket

**RoHS  
Compliant**

Stock No.: 7009483A067

### FEATURES

- 75Ω impedance
- BNC Socket to BNC Socket
- 4GHz

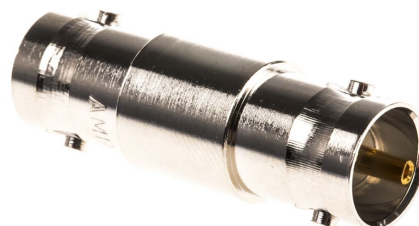


### Product Description

Adaptors to facilitate interconnections between common connectors–Straight 75Ω RF Adapter BNC Socket to BNC Socket.

### General Specifications

Attribute	Value
Adapter Type	Coaxial Socket to Coaxial Socket
Adapter Type A	BNC
Adapter Type B	BNC
Gender A	Female
Gender B	Female
Impedance	75Ω
Body Orientation	Straight
Contact Plating	Gold, Silver
Length	32.5mm
Body Plating	Nickel
Cable Type	Coaxial
Contact Material	Phosphor Bronze

## Product Drawing

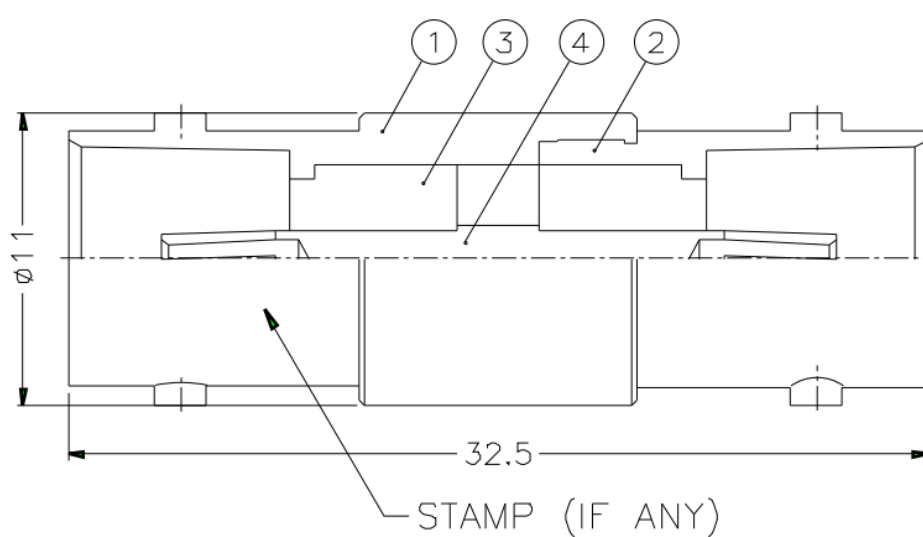

Dimensions: Millimeters (Inches)

### Part Number Table

Part Number	Description
7009483A067	Straight 75Ω RF Adapter BNC Socket to BNC Socket

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.