

### **BNC Connector Jack, Female Socket 50 Ohms Panel Mount Solder Cup**

# RoHS Compliant

#### **FEATURES**

- BNC Plug
- 50 Ohms
- Panel Mount



Stock No.: 9200883C0158

#### **Product Description**


BNC connector has a robust center contact and outer conductor interface. BNC connectors generally work up to 4 GHz and are a cost-effective way of insuring a highly dependable RF Coaxial connection.


#### **General Specifications**


Attribute	Value
Connector Style	BNC
Gender	Male
Impedance	50Ω
Mounting Type	Panel Mount
Frequency Range	4 GHz
Body Orientation	Straight
Polarity	Normal
Contact Plating	Gold
Body Plating	Nickel
Contact Material	Beryllium Copper
Voltage Rating	500 V
Temperature Range	-55°C ~ 85°C



#### Product Drawing



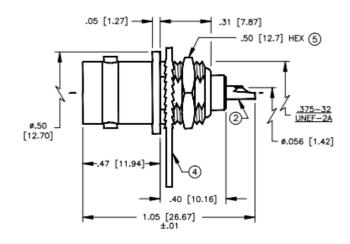



SUGGESTED MOUNTING CONFIGURATION
MAXIMUM PANEL THICKNESS: .135

## SPECIFICATIONS:

IMPEDANCE: 50 OHMS

WORKING VOLTAGE: 500 VRMS @ SEA LEVEL FREQUENCY RANGE: 0-4 GHz

INTERFACE PER MIL-STD-348A, SECTION 301.2

Dimensions: Millimeters (Inches)

#### **Part Number Table**

Part Number	Description
9200883C0158	BNC Connector Jack, Female Socket 50 Ohms Panel Mount Solder Cup

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.