




Connectors > PCB Connectors > PCB Headers & Receptacles

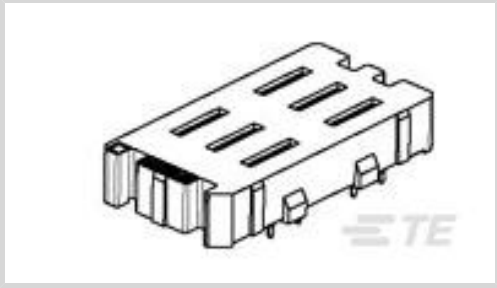

PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **6**

Number of Rows: **3**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Pairs per Column	0
Number of Power Positions	6
Number of Pairs	0
Stackable	No
Number of Signal Positions	0
PCB Mount Orientation	Vertical
Number of Positions	6
Number of Rows	3
Board-to-Board Configuration	Parallel

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	750 VAC
Insulation Resistance	1000 MΩ
Impedance	100 Ω



Operating Voltage	6 VDC
-------------------	-------

Signal Characteristics

Data Rate	16 Gb/s
-----------	---------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

PCB Contact Termination Area Plating Material Thickness	.5 – 2.54 µm[19.68 – 100 µin]
Contact Layout	Staggered
Mating Tab Width	4.5 mm[.177 in]
Mating Tab Thickness	.3 mm[.011 in]
PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.076 µm[3 µin]
Contact Type	Socket
Contact Current Rating (Max)	18 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.74 mm[.029 in]
Termination Post & Tail Length	2.05 mm[.08 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit

Mechanical Attachment

PCB Mount Alignment Type	Post Polarization
Mating Retention	With
Mating Alignment	With
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	9.14 mm[.36 in]



Housing Material	LCP (High Temp Thermoplastic)
------------------	-------------------------------

Dimensions

Connector Height	4.49 mm[.176 in]
PCB Thickness (Recommended)	.06 mm[.8 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	48
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 9-2149520-0
STRADA MESA,HD,HF,000,000,06,SN,N,40

TE Part # 7-2149520-5
STRADA MESA,HD,HF,000,000,06,SN,N,25

TE Part # 7-2149520-2
STRADA MESA,HD,HF,000,000,06,SN,N,22

Customers Also Bought

TE Part #1410186-1
MULTIGIG RT T2 .8" BP H-LFT

TE Part #1410142-1
MULTIGIG RT T2 .8" BP FULL RGH

TE Part #1410140-1
MULTIGIG RT T2 .8" BP FULL CNT

TE Part #1410187-3
MULTIGIG RT T2 7RW DC DF CT

TE Part #YDTS24F13-98PNV001
RECP ASSY

TE Part #1410189-3
MULTIGIG RT T2 7RW H-LFT,ET2

TE Part #292254-2
CT RELAY HDR ASSY 2P NAT

Documents

- CAD Files

Customer View Model

[ENG_CVM_CVM_5-2149521-1_A.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5-2149521-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-2149521-1_A.3d_stp.zip](#)

English

5-2149521-1

PCB Mount Receptacle, Vertical, Board-to-Board, 6 Position, 9.14 mm [.36 in]
Centerline, Gold, Through Hole - Press-Fit, Power & Signal, Black, Tray



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English